

# VIDEX®

VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274

## TECHNICAL CARD




LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

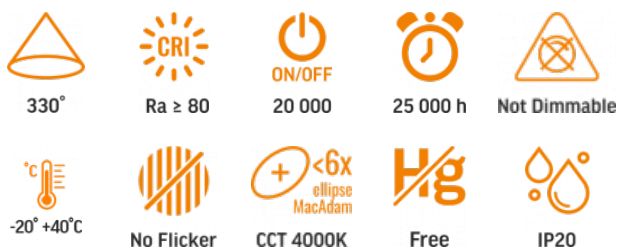**VIDEX-E27-A96-30W-NW**
**INDEX: VLE-A96-30274**


## WARRANTY 2 YEARS

**NEUTRAL WHITE**

**4000K**

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

## General parameters

**Light source or containing product** Light source

## Type of light source

<b>Energy class of the light source</b>	F
<b>Dimmable</b>	no
<b>Technology</b>	LED

## Electrical parameters

<b>On-mode power (Pon)</b>	30 W
<b>Rated voltage, frequency</b>	AC 176-264 V, 50/60 Hz
<b>Rated current</b>	140 mA
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	30

## Photometric parameters

<b>Useful luminous flux (Φuse)</b>	3200 Lm
<b>Correlated color temperature</b>	4000K (neutral white)
<b>Beam angle</b>	330°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	25000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
<b>Flicker metric (Pst LM)</b>	≤1
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (4000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

## Additional information

<b>Place of application</b>	indoor
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20

## Dimensions

<b>EAN</b>	5904405540190
<b>In the package</b>	1 pc.
<b>Height</b>	228 mm
<b>Outer box</b>	20 pcs.
<b>Width</b>	96 mm

# VIDEX®

VIDEX-E27-A96-30W-NW



INDEX: VLE-A96-30274

Depth 96 mm

## Signs marking goods





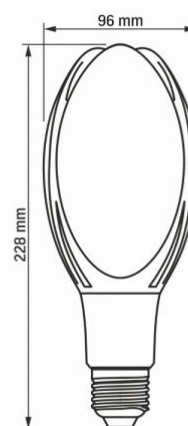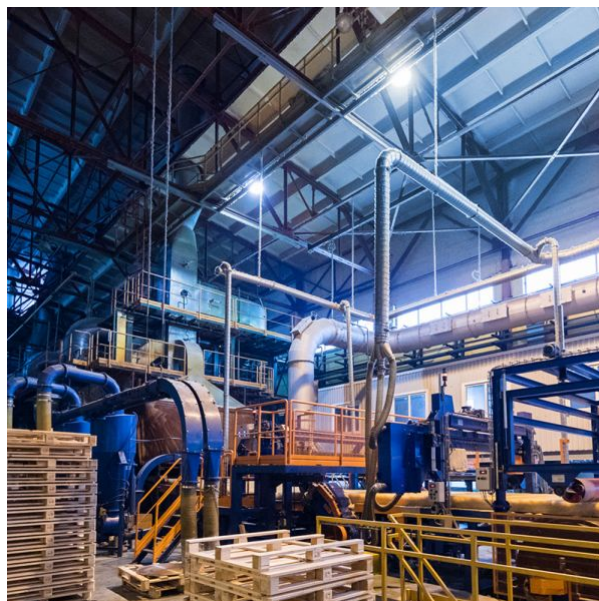









## Packaging marking

CE, Not suitable for use under moisture, Utilization



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product meets the requirements of EU directives
-  Not suitable for use under moisture
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
330°
-  — Ra > 80 - color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
20 000
-  — Nominal lifetime (hours)  
25 000 h
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +40°C
-  — The flickering of the light does not exceed the permissible level  
No Flicker
-  — Colour consistency in MacAdam ellipses (SDCM)  
CCT 4000K
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture.  
Protection against solid objects larger than 12 mm; no protection against moisture  
IP20