

TECHNICAL CARD



LED Dimmable Desk Lamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



ON/OFF

25 000



30 000 h



Free



Dimmable



-10° +40°C



Free



IP20

WARRANTY 2 YEARS

General parameters

Light source or containing product	Containing product
Control gear replaceable	yes
Light source replaceable	no

Type of light source

Energy efficiency class of the contained light source	F
Dimmable	5-step

Electrical parameters

Rated voltage, frequency	AC 100-240 V, 50/60 Hz
Rated current	45 mA
Input interface	AC adapter
Electric shock protection class	II

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	490 Lm
--	--------

VIDEX-DESK-LAMP-RIO-WHITE

INDEX: VLE-TF05W

Correlated color temperature	5500K (cold white), 4000K (neutral white), 3000K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	25000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source in a sphere reference	in a sphere (360°)

Additional information

Place of installation	Desk
Place of application	indoor
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-10° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

Dimensions

EAN	5904405541234
In the package	1 pc.
Height	329 mm
Outer box	16 pcs.
Width	150 mm
Depth	150 mm

VIDEX®

VIDEX-DESK-LAMP-RIO-WHITE

INDEX: VLE-TF05W

Signs marking goods

Packaging marking

Recycling of
waste, CE,
Utilization




VIDEX®

VIDEX-DESK-LAMP-RIO-WHITE

INDEX: VLE-TF05W

INDEX: VLE-TF05W

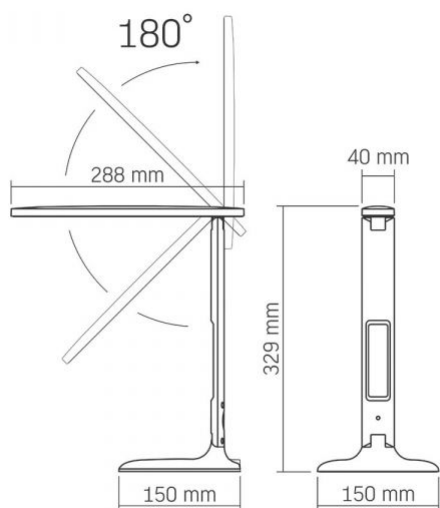

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



25 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Dimmable

The product has 5-level brightness adjustment



-10° +40°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture