

TECHNICAL CARD



LED Frameless Downlight Fixture



VIDEX®



120°



Ra ≥ 80



20 000



30 000 h



Free



Not Dimmable



-20° +40°C



Free



IP20

↓ IP54

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

| | |
|---|--------------------|
| Light source or containing product | Containing product |
| Light source replaceable | by the producer |
| Control gear replaceable | by the producer |

Type of light source

Energy efficiency class of the contained light source F

Dimmable no

Electrical parameters

Rated voltage, frequency AC 85-265 V, 50/60 Hz

Rated current 78 mA

VIDEX-DOWNLIGHT-LED-DLFS-9W-NW

INDEX: VLE-DLFS-094

| | |
|--|----------------|
| Input interface | Free wire ends |
| Electric shock protection class | II |

Photometric parameters

| | |
|---|-----------------------|
| Useful luminous flux of the contained light source (Φ_{use}) | 1000 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 30000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information

| | |
|------------------------------------|-------------------|
| Place of installation | Ceiling, Recessed |
| Place of application | indoor |
| Housing colour | White |
| Diffuser material | Plastic |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP54 / IP20 |
| Housing material | Iron alloy |


Dimensions

VIDEX®

VIDEX-DOWNLIGHT-LED-DLFS-9W-NW

INDEX: VLE-DLFS-094



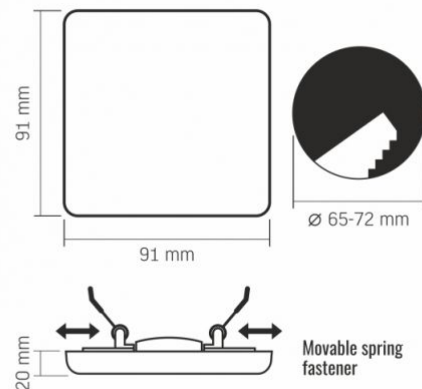








| | |
|------------------|---------------|
| EAN | 5904405540817 |
| Outer box | 20 pcs. |
| Height | 91 mm |
| Width | 91 mm |
| Depth | 20 mm |



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLE-DLFS-094

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Rated On/off cycles
ON/OFF
20 000
-  — Nominal lifetime (hours)
30 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +40°C
-  — The product does not contain mercury
Free
-  — IP54 - external part, IP20 - mounting part
IP20
↓
IP54