

## TECHNICAL CARD



LED Panel



# VIDEX®



120°



Ra ≥ 80



20 000



30 000 h



Free



Not Dimmable



-20° +40°C



Free



IP20

## WARRANTY 3 YEARS

### NEUTRAL WHITE



### 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtalno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

<b>Light source or containing product</b>	Containing product
---	--------------------

<b>Control gear replaceable</b>	by the producer
---------------------------------	-----------------

<b>Light source replaceable</b>	by the producer
---------------------------------	-----------------

## Type of light source

<b>Dimmable</b>	no
-----------------	----

<b>Energy efficiency class of the contained light source</b>	D
--	---

## Electrical parameters

<b>Rated voltage, frequency</b>	AC 175-265 V, 50/60 Hz
---------------------------------	------------------------

<b>Rated current</b>	300 mA
----------------------	--------

## VIDEX-PANEL-LED-40W-P404W-NW

### INDEX: VLE-P404W

<b>Input interface</b>	Free wire ends
------------------------	----------------

<b>Electric shock protection class</b>	II
--	----

## Photometric parameters

<b>Correlated color temperature</b>	4000K (neutral white)
-------------------------------------	-----------------------

<b>Useful luminous flux of the contained light source (Φ<sub>use</sub>)</b>	5200 Lm
---	---------

<b>Beam angle</b>	120°
-------------------	------

<b>Color rendering index (CRI)</b>	Ra > 80
------------------------------------	---------

<b>On/Off cycles</b>	20000
----------------------	-------

<b>Lifetime</b>	30000 h
-----------------	---------

<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
---	--------------------

## Additional information

<b>Place of installation</b>	Armstrong ceiling, Ceiling
------------------------------	----------------------------

<b>Place of application</b>	indoor
-----------------------------	--------

<b>Housing colour</b>	White
-----------------------	-------

<b>Diffuser material</b>	Plastic
--------------------------	---------

<b>Ultraviolet radiation</b>	no
------------------------------	----

<b>Operating temperature range</b>	-20° +40°C
------------------------------------	------------

<b>Mercury content</b>	Does not contain
------------------------	------------------

<b>Ingress protection</b>	IP20
---------------------------	------

<b>Housing material</b>	Aluminum
-------------------------	----------


## Dimensions

**VIDEX**<sup>®</sup>

VIDEX-PANEL-LED-40W-P404W-NW

**INDEX: VLE-P404W**

<b>EAN</b>	5904405540626
<b>Height</b>	595 mm
<b>Depth</b>	10.8 mm
<b>Width</b>	595 mm
<b>Outer box</b>	5 pcs.

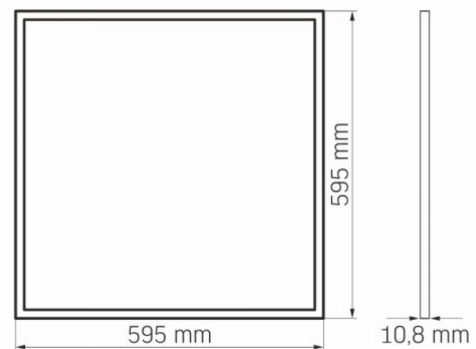












**Signs marking goods****Packaging marking** CE, Utilization

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



## INDEX: VLE-P404W

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
-  — Nominal lifetime (hours)
-  — The product does not emit ultraviolet light
-  — The product is incompatible with light regulators
-  — Operating temperatures range
-  — The product does not contain mercury
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture