

## TECHNICAL CARD

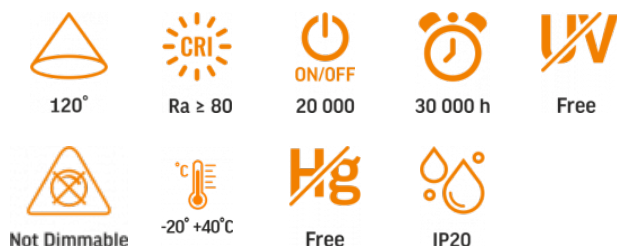


LED Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

**VIDEX-PANEL-LED-40W-P406W-CW**
**INDEX: VLE-P406W**


## WARRANTY 3 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kúlm valge.

## General parameters

<b>Light source or containing product</b>	Containing product
<b>Control gear replaceable</b>	by the producer
<b>Light source replaceable</b>	by the producer

## Type of light source

<b>Energy efficiency class of the contained light source</b>	D
<b>Dimmable</b>	no

## Electrical parameters

<b>Rated voltage, frequency</b>	AC 175-265 V, 50/60 Hz
<b>Rated current</b>	300 mA
<b>Input interface</b>	Free wire ends

**Electric shock protection class** II

## Photometric parameters

<b>Useful luminous flux of the contained light source (Φuse)</b>	5200 Lm
<b>Correlated color temperature</b>	6000K (cold white)
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)

## Additional information

<b>Place of installation</b>	Armstrong ceiling, Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	White
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

## Dimensions

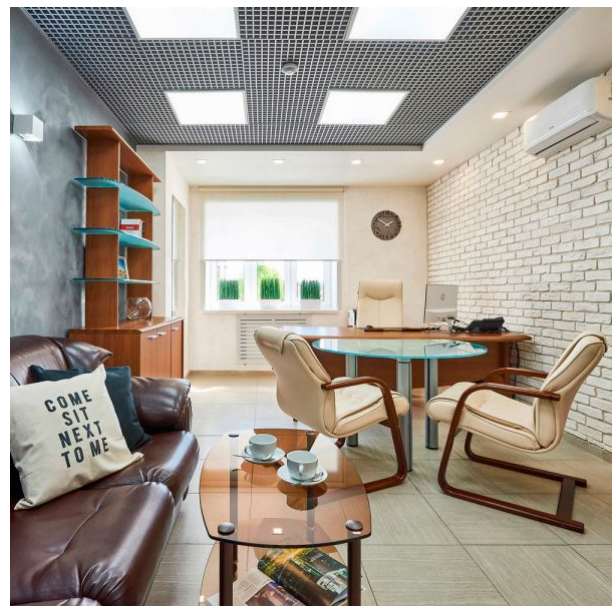
<b>EAN</b>	5904405540633
<b>In the package</b>	1 pc.

**VIDEX®**

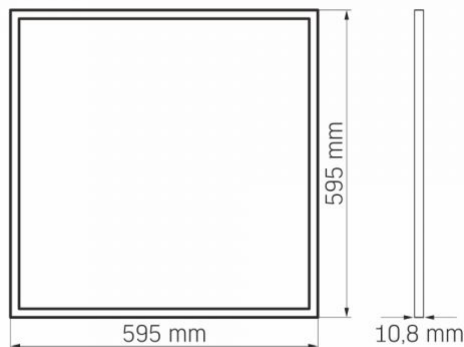
VIDEX-PANEL-LED-40W-P406W-CW

**INDEX: VLE-P406W**

<b>Height</b>	595 mm
<b>Outer box</b>	5 pcs.
<b>Width</b>	595 mm
<b>Depth</b>	10.8 mm

**Signs marking goods****Packaging marking**Recycling of  
waste, CE,  
Utilization

## INDEX: VLE-P406W



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-20° +40°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture