


TECHNICAL CARD



LED Surface Downlight Fixture



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

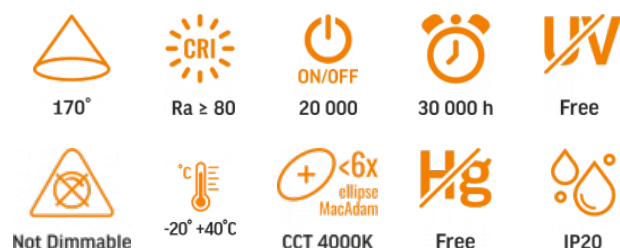VIDEX®
VIDEX-DOWNLIGHT-LED-DLRS-BLACK-18W-NW
INDEX: VLE-DLRS-184B


WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрально бяла / Bianco neutro.

General parameters

| | |
|------------------------------------|--------------------|
| Light source or containing product | Containing product |
| Control gear replaceable | by the producer |
| Light source replaceable | by the producer |

Type of light source

| | |
|--|------|
| Dimmable | no |
| Directional (DLS) or non-directional (NDLS) light source | NDLS |
| Connected light source (cls) | no |
| Color-tunable light source | no |
| Mains (MLS) or non-mains (NMLS) light source | NMLS |
| High luminance light source | No |
| Anti-glare shield | No |

| | |
|---|-----|
| Technology | LED |
| Energy efficiency class of the contained light source | E |

Electrical parameters

| | |
|---|------------------------|
| On-mode power (Pon) | 15 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 120 mA |
| Input interface | Free wire ends |
| Electric shock protection class | II |
| Energy consumption in on-mode of the light source (kWh/1000h) | 18 |
| Displacement factor (cos φ1) | - |
| Survival factor | 0.9 |

Photometric parameters

| | |
|---|-----------------------|
| Useful luminous flux of the contained light source (Φuse) | 1850 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 170° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime | 30000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| Chromaticity coordinates (x) | 0.38 |
| Chromaticity coordinates (y) | 0.38 |
| R9 colour rendering index value | >0 |

INDEX: VLE-DLRS-184B

| | |
|--|------------|
| The lumen maintenance factor | ≥96% |
| Colour consistency in MacAdam ellipses (SDCM) | <6 (4000K) |
| Flicker metric (Pst LM) | - |
| Stroboscopic effect metric (SVM) | - |
| CRI Min | Ra 80 |
| CRI Max | Ra 89 |

Additional information

| | |
|---|-----------------------------|
| Place of installation | Ceiling, Flat surface, Wall |
| Place of application | indoor |
| Housing colour | Black |
| Diffuser material | Plastic |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Suitable for installation in normally flammable surfaces | yes |
| Mercury content | Does not contain |
| Ingress protection | IP20 |
| Housing material | Iron alloy |

Dimensions

| | |
|-----------------------|---------------|
| EAN | 5904405542521 |
| Height | 192 mm |
| Depth | 29 mm |
| Width | 192 mm |
| In the package | 1 pc. |


| | |
|-------------------------|---------|
| Outer box | 20 pcs. |
| Unit nett weight | 420g |

Signs marking goods

| | |
|--------------------------|-------------------------------------|
| Packaging marking | Recycling of waste, CE, Utilization |
|--------------------------|-------------------------------------|





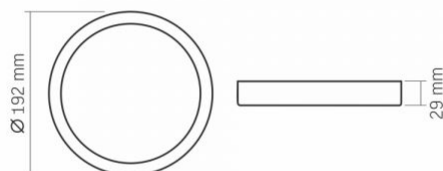




INDEX: VLE-DLRS-184B



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle 170°
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles 20 000
-  — Nominal lifetime (hours) 30 000 h
-  — The product does not emit ultraviolet light
-  — The product is incompatible with light regulators
-  — Operating temperatures range -20° ~ +40°C
-  — Colour consistency in MacAdam ellipses (SDCM) <6X
-  — The product does not contain mercury
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture