

## TECHNICAL CARD



LED Track Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX-TOR-30W-BLACK

### INDEX: VLE-TR04-304B

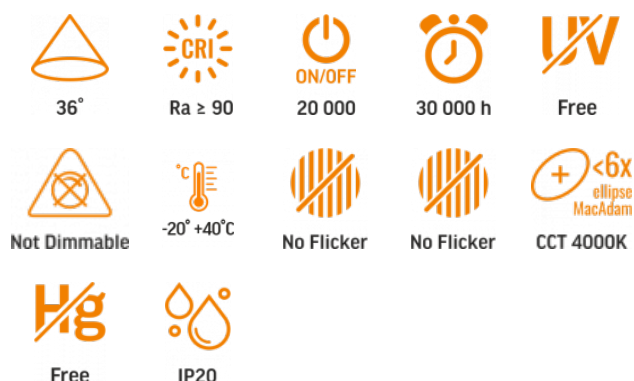

## WARRANTY 3 YEARS

### NEUTRAL WHITE



### 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

**Light source or containing product** Light source

**Light source replaceable** by the producer

## Type of light source

**Energy class of the light source** F

**Dimmable** no

**Directional (DLS) or non-directional (NDLS) light source** DLS

**Color-tunable light source** no

**Mains (MLS) or non-mains (NMLS) light source** MLS

**Technology** LED

## Electrical parameters

<b>On-mode power (Pon)</b>	30 W
<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz
<b>Rated current</b>	145 mA
<b>Input interface</b>	2 Wires Busbar
<b>Electric shock protection class</b>	II
<b>Displacement factor (cos φ1)</b>	0.9
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	30

## Photometric parameters

<b>Useful luminous flux (Φuse)</b>	2400 Lm
<b>Correlated color temperature</b>	4000K (neutral white)
<b>Beam angle</b>	36°
<b>Color rendering index (CRI)</b>	Ra > 90
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a narrow cone (90°)
<b>Chromaticity coordinates (x)</b>	0.38
<b>Chromaticity coordinates (y)</b>	0.38
<b>R9 colour rendering index value</b>	>0
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (4000K)
<b>CRI Min</b>	Ra 90

CRI Max Ra 95

## Additional information

Place of installation	Busbar track
Place of application	indoor
Housing colour	Black
Diffuser material	PMMA
Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum alloy

## Dimensions

EAN	5904405541470
In the package	1 pc.
Height	180 mm
Outer box	20 pcs.
Width	77 mm
Depth	77 mm


## Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------








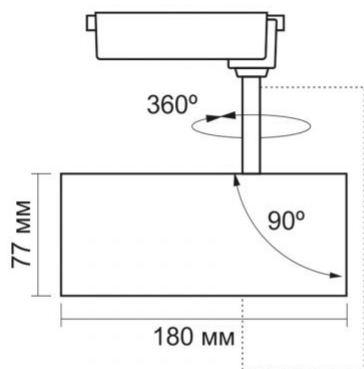













**VIDEX<sup>®</sup>****VIDEX-TOR-30W-BLACK****INDEX: VLE-TR04-304B**

### INDEX: VLE-TR04-304B



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Minimum distance from the illuminated object  
0,5 m
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  Rated beam angle  
36°
-  Ra > 90 - color rendering index  
Ra > 90
-  Rated On/off cycles  
ON/OFF 20 000
-  Nominal lifetime (hours)  
30 000 h
-  The product does not emit ultraviolet light  
Free
-  The product is incompatible with light regulators  
Not Dimmable
-  Operating temperatures range  
-20°-40°C
-  The flickering of the light does not exceed the permissible level  
No Flicker
-  The product has minimal flickering, which should not cause discomfort or danger  
No Flicker
-  Colour consistency in MacAdam ellipses (SDCM)  
CCT 4000K
-  The product does not contain mercury  
Free
-  Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture  
IP20