

## TECHNICAL CARD



Light sensor

# VIDEX®



Free



-20° +40°C



IP44

## WARRANTY 2 YEARS

### Electrical parameters

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Input interface	Free wire ends
Electric shock protection class	II

### Photometric parameters

Sensor activation threshold	<10 Lx
Sensor deactivation threshold	>40 Lx

### Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Housing colour	White
Ultraviolet radiation	no
Motion sensor	yes
Sensor type	Microwave
Operating temperature range	-20° +40°C
Ingress protection	IP44
Housing material	ABS, PE (Polyethylene)

## VIDEX 6A photometrical

### INDEX: VL-SN01

### Dimensions



EAN	4820118299327
Height	90 mm
Depth	35 mm
In the package	1 pc.
Outer box	50 pcs.
Width	49 mm
Unit nett weight	50g

### Signs marking goods

#### Packaging marking

Recycling of waste, CE, Utilization

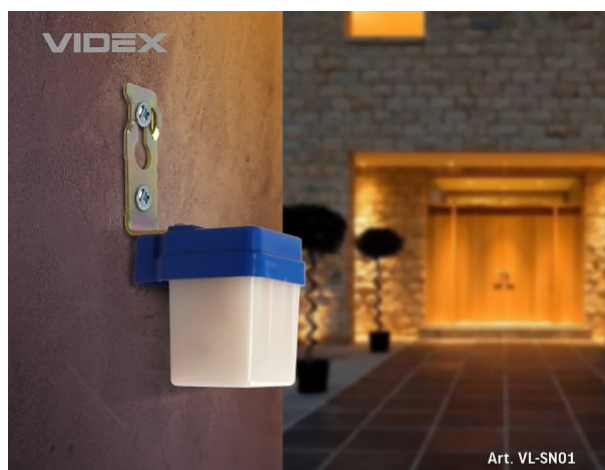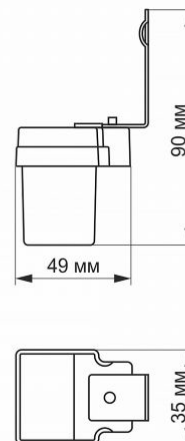

**INDEX: VL-SN01**


Art. VL-SN01


 ON  
OFF

 10 lx  
40 lx

 -20°C  
+40°C


6A



IP44

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Free

The product does not emit ultraviolet light


 -20°C  
+40°C

Operating temperatures range



IP44

Class of protection against dust and moisture. Protection against solid foreign objects with a diameter of 1 mm and greater and against water splashes