

TECHNICAL CARD



Universal Battery charger

VIDEX®



Free

WARRANTY 1 YEAR

General parameters

Compatible	32700, 26650, 26500, 21700, 18650, 17500, 16340, 14500, 10440, AA, AAA, C, D, SC, A, AAAA
-------------------	---

Electrical parameters

Input interface	USB-C
Electric shock protection class	II

Additional information

Housing colour	Black
Operating temperature range	0° +35°C
Battery voltage	3.2 V, 3.7 V, 1.2 V
Battery type	LiFePO4, Li- ion / IMR, Ni- MH / Cd
Mercury content	Does not contain
Housing material	ABS

Dimensions

EAN	4820118296562
In the package	1 pc.

VIDEX VCH-UT201

INDEX: VCH-UT201

Height	135 mm
Outer box	20 pcs.
Width	73 mm
Depth	37 mm
Unit nett weight	132g

Signs marking goods


Packaging marking	CE, Utilization
--------------------------	-----------------



VIDEX[®]

VIDEX VCH-UT201

INDEX: VCH-UT201

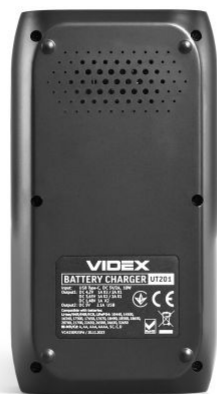

VIDEX®

VIDEX VCH-UT201

INDEX: VCH-UT201



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The product does not contain mercury