

## TECHNICAL CARD



Facade double-sided luminaire



# VIDEX®



IK07



-25° +50°C



Free



IP54

## WARRANTY 2 YEARS

### General parameters

**Light source replaceable** end user

### Electrical parameters

**Rated voltage, frequency** AC 220-240 V, 50/60 Hz

**Input interface** Terminal block

**Electric shock protection class** I

### Additional information

**Place of installation** Wall

**Place of application** outdoor

**Impact protection** IK07

**Housing colour** Gray

**Operating temperature range** -25° +50°C

**Mercury content** Does not contain

**Ingress protection** IP54

**Housing material** Aluminum

### Dimensions

**EAN** 4820246480901

**Height** 225 mm

## VIDEX-2XGU10-BRUNO-GRAY

### INDEX: VL-AR072G


**Depth** 112 mm

**Width** 80 mm

**Outer box** 12 pcs.



## INDEX: VL-AR072G

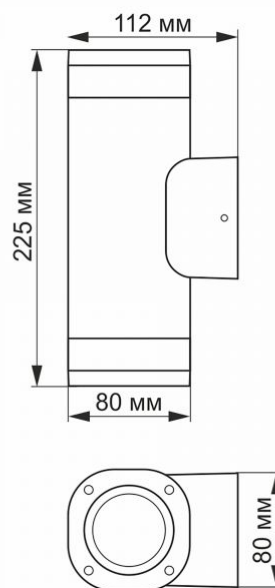

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



IK07

— The product withstands a medium impact (e.g., from a blunt object)



-25°+50°C

— Operating temperatures range



Free

— The product does not contain mercury



IP54

— Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing