

## TECHNICAL CARD



Garden luminaire




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®


## VIDEX-3W-LUKA-SILVER 60CM

### INDEX: VL-AR05-03062S

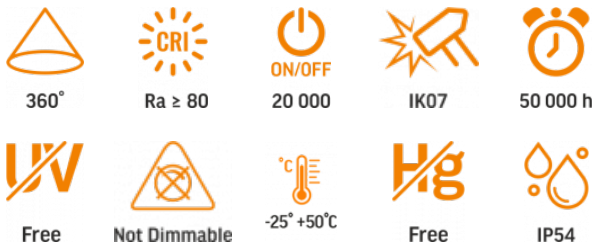

## WARRANTY 2 YEARS

### WARM WHITE



### 2700K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

## General parameters

Light source or containing product	Containing product
Light source replaceable	no
Control gear replaceable	no

## Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

## Electrical parameters

On-mode power (Pon)	3 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	26 mA

Input interface Terminal block

## Photometric parameters

Useful luminous flux of the contained light source (Φuse)	300 Lm
Correlated color temperature	2700K (warm white)
Beam angle	360°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	50000 h
CRI Min	Ra 80
CRI Max	Ra 88

## Additional information

Place of installation	Floor
Place of application	outdoor
Impact protection	IK07
Housing colour	Silver
Ultraviolet radiation	no
Operating temperature range	-25° +50°C
Mercury content	Does not contain
Ingress protection	IP54
Housing material	Stainless Steel

## Dimensions

EAN 4820246480802

# VIDEX®

VIDEX-3W-LUKA-SILVER 60CM

INDEX: VL-AR05-03062S

<b>In the package</b>	1 pc.
<b>Height</b>	600 mm
<b>Outer box</b>	12 pcs.
<b>Width</b>	76 mm
<b>Depth</b>	76 mm

## Signs marking goods

### Packaging marking


Recycling of  
waste, CE,  
Utilization



# VIDEX®





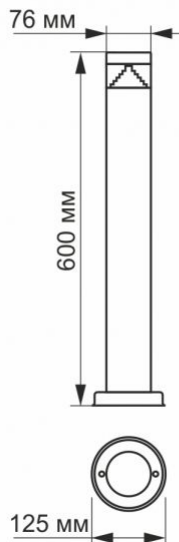









## VIDEX-3W-LUKA-SILVER 60CM

### INDEX: VL-AR05-03062S



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used outdoors
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
360°
-  — Ra > 80 - color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)  
IK07
-  — Nominal lifetime (hours)  
50 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-25° +50°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing  
IP54