

VIDEX®

VIDEX 72W 1.2M 5000K 8000Lm Black

INDEX: VLE-BN-72125B

TECHNICAL CARD



LED Batten Light

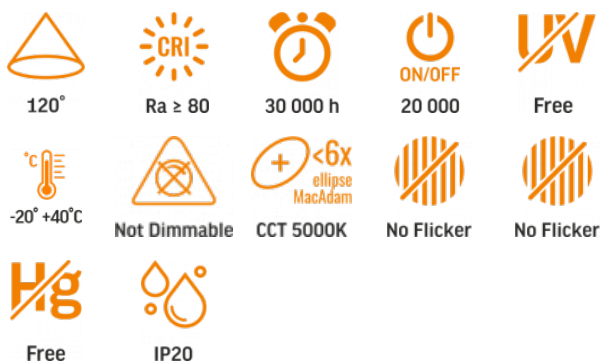


Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX 72W 1.2M 5000K 8000Lm Black

INDEX: VLE-BN-72125B



WARRANTY 3 YEARS



NEUTRAL WHITE 



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	by the producer
Light source replaceable	by the producer
Light source or containing product	Containing product

Type of light source

Energy class of the light source	E
Dimmable	no
Directional or non-directional light source	NDLS
Mains or non-mains light source	MLS

Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	72 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	386 mA
Input interface	Free wire ends
Electric shock protection class	I
Displacement factor (cos φ1)	0.9
Survival factor	0.9

Photometric parameters

Useful luminous flux of the light source (Φuse)	8000 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.35
Chromaticity coordinates (y)	0.36

INDEX: VLE-BN-72125B

R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
Stroboscopic effect metric (SVM)	≤0.4
Flicker metric (Pst LM)	≤1
CRI Min	Ra 80
CRI Max	Ra 88

Depth	1200 mm
Outer box	16 pcs.
Unit nett weight	675g
In the package	1 pc.

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

Additional information

Place of installation	Ceiling, Wall
Place of application	indoor
Housing colour	Black
Minimum distance from the illuminated object	0.5 m
Diffuser material	Plastic
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum

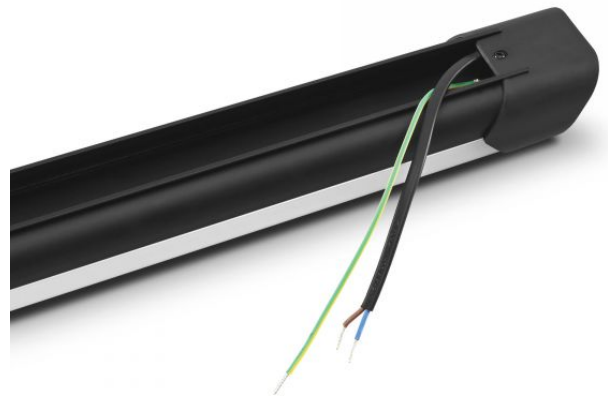
Dimensions

EAN	4820246484589
Height	45 mm
Width	60 mm




VIDEX®

VIDEX 72W 1.2M 5000K 8000Lm Black

INDEX: VLE-BN-72125B

VIDEX[®]

VIDEX 72W 1.2M 5000K 8000Lm Black

INDEX: VLE-BN-72125B

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.