

TECHNICAL CARD



LED Batten Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

| | |
|--------------------------|-----------------|
| Control gear replaceable | - |
| Light source replaceable | by the producer |

Type of light source

| | |
|----------------------------------|----|
| Energy class of the light source | E |
| Dimmable | no |

Electrical parameters

| | |
|----------------------------------|------------------------|
| On-mode power (P _{on}) | 27 W |
| Rated voltage, frequency | AC 185-265 V, 50/60 Hz |
| Rated current | 130 mA |
| Input interface | Free wire ends |
| Electric shock protection class | I |

VIDEX-BATTEN-LED-27W-NW

INDEX: VLE-BN-27064

Photometric parameters

| | |
|--|-----------------------|
| Useful luminous flux of the light source (Φ _{use}) | 3550 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime | 20000 h |
| On/Off cycles | 20000 |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information

| | |
|--|--------------------|
| Place of installation | Ceiling, Wall |
| Place of application | indoor |
| Housing colour | Unpainted aluminum |
| Minimum distance from the illuminated object | 0.5 m |
| Diffuser material | Plastic |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |
| Housing material | Aluminum |

Dimensions


| | |
|-----|---------------|
| EAN | 5904405541005 |
|-----|---------------|

VIDEX[®]

VIDEX-BATTEN-LED-27W-NW

INDEX: VLE-BN-27064

| | |
|------------------|---------|
| Height | 25 mm |
| Width | 75 mm |
| Depth | 615 mm |
| Outer box | 20 pcs. |

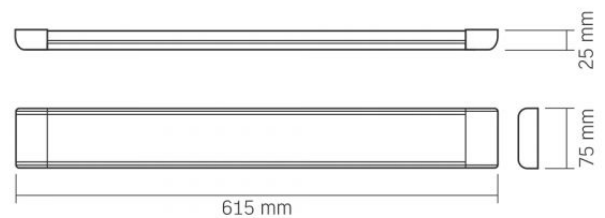

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 22.12.2024