

TECHNICAL CARD



LED Batten Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



20 000 h

ON/OFF
20 000

Free



Not Dimmable



-20° +40°C



Free



IP20

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevrnalno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Control gear replaceable	-
Light source replaceable	by the producer

Type of light source

Energy class of the light source	E
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	50 W
Rated voltage, frequency	AC 185-265 V, 50/60 Hz
Rated current	240 mA
Input interface	Free wire ends

VIDEX-BATTEN-LED-50W-NW

INDEX: VLE-BN-50124

Electric shock protection class I

Photometric parameters

Correlated color temperature	4000K (neutral white)
Useful luminous flux of the contained light source (Φuse)	6250 Lm
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	20000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)

Additional information

Place of installation	Ceiling, Wall
Place of application	indoor
Housing colour	Unpainted aluminum
Minimum distance from the illuminated object	0.5 m
Diffuser material	Plastic
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Aluminum


Dimensions

VIDEX[®]

VIDEX-BATTEN-LED-50W-NW

INDEX: VLE-BN-50124

EAN	5904405541012
Width	75 mm
Height	25 mm
Depth	1215 mm
In the package	1 pc.
Outer box	20 pcs.

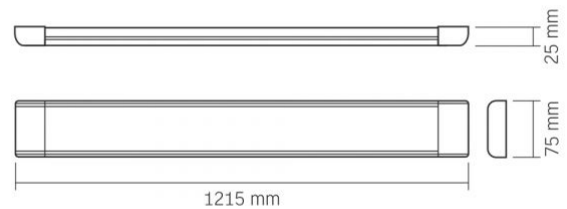

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Minimum distance from the illuminated object



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



— Rated beam angle



— Ra > 80 - color rendering index



20 000 h

— Nominal lifetime (hours)



ON/OFF
20 000

— Rated On/off cycles



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm; no protection against moisture