

TECHNICAL CARD



LED Batten Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	-
--------------------------	---

Light source replaceable	by the producer
--------------------------	-----------------

Type of light source

Energy class of the light source	E
----------------------------------	---

Dimmable	no
----------	----

Technology	LED
------------	-----

Electrical parameters

On-mode power (P _{on})	50 W
----------------------------------	------

Rated voltage, frequency	AC 185-265 V, 50/60 Hz
--------------------------	------------------------

Rated current	240 mA
---------------	--------

Input interface	Free wire ends
-----------------	----------------

VIDEX-BATTEN-LED-50W-NW

INDEX: VLE-BN-50124

Electric shock protection class	I
---------------------------------	---

Photometric parameters

Useful luminous flux of the contained light source (Φ _{use})	6250 Lm
--	---------

Correlated color temperature	4000K (neutral white)
------------------------------	-----------------------

Beam angle	120°
------------	------

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	20000 h
----------	---------

On/Off cycles	20000
---------------	-------

Useful luminous flux of the light source reference	in a sphere (360°)
--	--------------------

Additional information

Place of installation	Ceiling, Wall
-----------------------	---------------

Place of application	indoor
----------------------	--------

Housing colour	Unpainted aluminum
----------------	--------------------

Minimum distance from the illuminated object	0.5 m
--	-------

Diffuser material	Plastic
-------------------	---------

Ultraviolet radiation	no
-----------------------	----

Operating temperature range	-20° +40°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP20
--------------------	------

Housing material	Aluminum
------------------	----------



Dimensions

VIDEX[®]

VIDEX-BATTEN-LED-50W-NW

INDEX: VLE-BN-50124

EAN	5904405541012
Height	25 mm
Width	75 mm
Depth	1215 mm
In the package	1 pc.
Outer box	20 pcs.

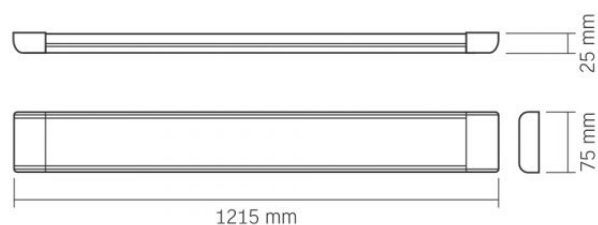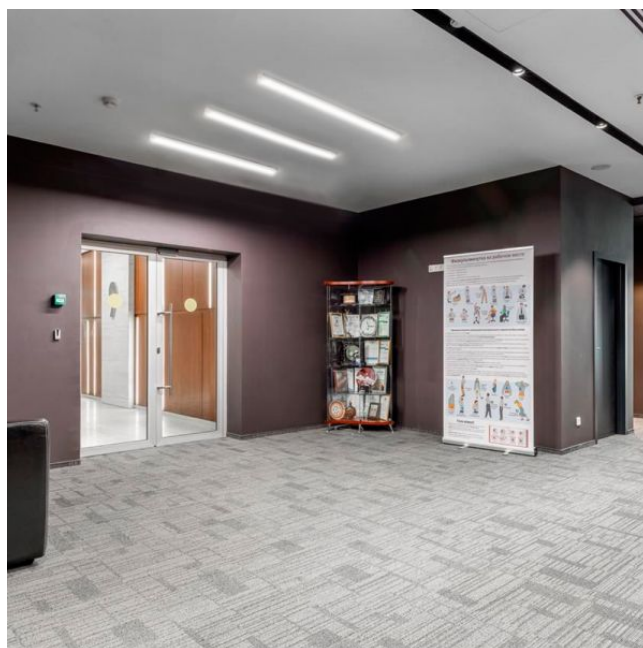

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 5.02.2025