

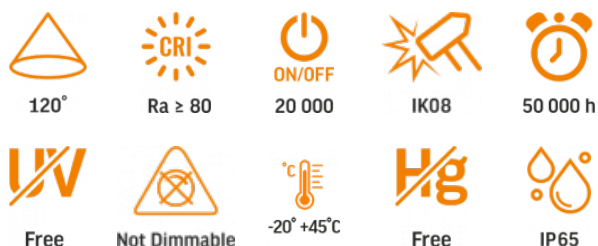

## TECHNICAL CARD



LED Batten Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

**INDEX: VLE-BNW-48124**

**WARRANTY 3 YEARS**
**NEUTRAL WHITE**


Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрально бяла / Bianco neutro.

**General parameters**

<b>Light source or containing product</b>	Containing product
<b>Control gear replaceable</b>	-
<b>Light source replaceable</b>	by the producer

**Type of light source**

<b>Dimmable</b>	no
<b>Technology</b>	LED
<b>Energy efficiency class of the contained light source</b>	E

**Electrical parameters**

<b>On-mode power (Pon)</b>	48 W
<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz

<b>Rated current</b>	240 mA
<b>Input interface</b>	Terminal block
<b>Electric shock protection class</b>	I

**Photometric parameters**

<b>Correlated color temperature</b>	4000K (neutral white)
<b>Useful luminous flux of the contained light source (Φuse)</b>	6000 Lm
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	50000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

**Additional information**

<b>Place of installation</b>	Ceiling, Flat surface, Wall
<b>Place of application</b>	indoor, outdoor
<b>Impact protection</b>	IK08
<b>Housing colour</b>	White
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +45°C

<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum

### Dimensions

<b>EAN</b>	5904405541425
<b>Height</b>	1200 mm
<b>Depth</b>	74 mm
<b>Width</b>	87 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	9 pcs.

### Signs marking goods

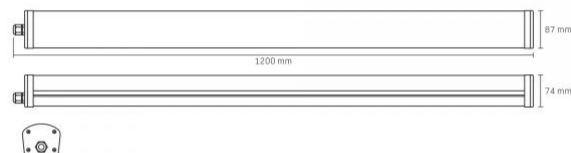
<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------



# VIDEX®


















VIDEX-HERMES-120CM-48W-IP65-NW

INDEX: VLE-BNW-48124



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Minimum distance from the illuminated object  
0,5 m
-  Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 – color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
ON/OFF  
20 000
-  — The product withstands strong impacts (e.g., from a heavy object)  
IK08
-  — Nominal lifetime (hours)  
50 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +45°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture.  
The product has full protection against dust and water jets from all directions  
IP65