

VIDEX®

VIDEX-E14-C35-6W-FIL-NW

INDEX: VLE-C35F-06144

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



360°



Ra ≥ 80



20 000 h

ON/OFF
20 000

-20° +40°C



Not Dimmable



Free



IP20

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

Type of light source

| | |
|----------------------------------|---|
| Energy class of the light source | E |
|----------------------------------|---|

| | |
|----------|----|
| Dimmable | no |
|----------|----|

Electrical parameters

| | |
|---------------------|-----|
| On-mode power (Pon) | 6 W |
|---------------------|-----|

| | |
|--------------------------|------------------------|
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
|--------------------------|------------------------|

| | |
|---------------|-------|
| Rated current | 52 mA |
|---------------|-------|

Photometric parameters

| | |
|--|--------|
| Useful luminous flux of the light source (Φ _{use}) | 806 Lm |
|--|--------|

| | |
|------------------------------|-----------------------|
| Correlated color temperature | 4000K (neutral white) |
|------------------------------|-----------------------|

| | |
|------------|------|
| Beam angle | 360° |
|------------|------|

| | |
|-----------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|-----------------------------|---------|

VIDEX-E14-C35-6W-FIL-NW

INDEX: VLE-C35F-06144

| | |
|----------|---------|
| Lifetime | 20000 h |
|----------|---------|

| | |
|---------------|-------|
| On/Off cycles | 20000 |
|---------------|-------|

| | |
|--|--------------------|
| Useful luminous flux of the light source reference | in a sphere (360°) |
|--|--------------------|

Additional information

| | |
|----------------------|--------|
| Place of application | indoor |
|----------------------|--------|

| | |
|-----------------------------|------------|
| Operating temperature range | -20° +40°C |
|-----------------------------|------------|

| | |
|-----------------|------------------|
| Mercury content | Does not contain |
|-----------------|------------------|

| | |
|--------------------|------|
| Ingress protection | IP20 |
|--------------------|------|

Dimensions

| | |
|-----|---------------|
| EAN | 5904405540114 |
|-----|---------------|

| | |
|--------|-------|
| Height | 98 mm |
|--------|-------|

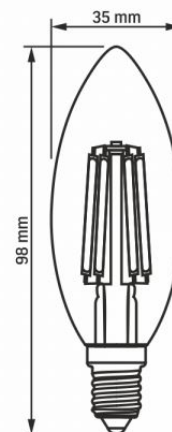
| | |
|-------|-------|
| Width | 35 mm |
|-------|-------|

| | |
|-------|-------|
| Depth | 35 mm |
|-------|-------|

| | |
|-----------|---------|
| Outer box | 20 pcs. |
|-----------|---------|

VIDEX[®]

VIDEX-E14-C35-6W-FIL-NW

INDEX: VLE-C35F-06144

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

