

TECHNICAL CARD



LED Bulb



VIDEX®



360°



Ra ≥ 80



20 000 h

ON/OFF
20 000

-20° +40°C



Not Dimmable



Free



IP20

WARRANTY 3 YEARS

WARM WHITE



3000K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe
valge / Тепло бяла / Bianco caldo.

Type of light source

| | |
|---|---|
| Energy class of the light source | E |
|---|---|

| | |
|-----------------|----|
| Dimmable | no |
|-----------------|----|

Electrical parameters

| | |
|----------------------------|-----|
| On-mode power (Pon) | 6 W |
|----------------------------|-----|

| | |
|---------------------------------|------------------------|
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
|---------------------------------|------------------------|

| | |
|----------------------|-------|
| Rated current | 52 mA |
|----------------------|-------|

Photometric parameters

| | |
|--|--------|
| Useful luminous flux of the contained light source (Φuse) | 806 Lm |
|--|--------|

| | |
|-------------------------------------|--------------------|
| Correlated color temperature | 3000K (warm white) |
|-------------------------------------|--------------------|

| | |
|-------------------|------|
| Beam angle | 360° |
|-------------------|------|

| | |
|------------------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|------------------------------------|---------|

VIDEX-E14-C35-6W-FIL-WW

INDEX: VLE-C35F-06143

| | |
|-----------------|---------|
| Lifetime | 20000 h |
|-----------------|---------|

| | |
|----------------------|-------|
| On/Off cycles | 20000 |
|----------------------|-------|

| | |
|---|--------------------|
| Useful luminous flux of the light source reference | in a sphere (360°) |
|---|--------------------|

Additional information

| | |
|-----------------------------|--------|
| Place of application | indoor |
|-----------------------------|--------|

| | |
|------------------------------------|------------|
| Operating temperature range | -20° +40°C |
|------------------------------------|------------|

| | |
|------------------------|------------------|
| Mercury content | Does not contain |
|------------------------|------------------|

| | |
|---------------------------|------|
| Ingress protection | IP20 |
|---------------------------|------|

Dimensions

| | |
|------------|---------------|
| EAN | 5904405540107 |
|------------|---------------|

| | |
|---------------|-------|
| Height | 98 mm |
|---------------|-------|

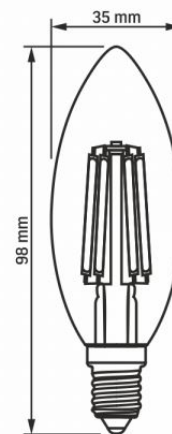
| | |
|--------------|-------|
| Width | 35 mm |
|--------------|-------|

| | |
|--------------|-------|
| Depth | 35 mm |
|--------------|-------|

| | |
|------------------|---------|
| Outer box | 20 pcs. |
|------------------|---------|

VIDEX[®]

VIDEX-E14-C35-6W-FIL-WW

INDEX: VLE-C35F-06143

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

