

# VIDEX®

VIDEX-E14-G45-4W-WW

INDEX: VLE-G45e-04143

## TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



240°



Ra ≥ 80



20 000 h

ON/OFF  
20 000

Not Dimmable



Free



IP20

## WARRANTY 2 YEARS

### WARM WHITE



### 3000K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /  
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla  
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe  
valge / Тепло бяла / Bianco caldo.

### Type of light source

|   |   |
|---|---|
| <b>Energy class of the light source</b> | F |
|---|---|

|                 |    |
|-----------------|----|
| <b>Dimmable</b> | no |
|-----------------|----|

### Electrical parameters

|                            |     |
|----------------------------|-----|
| <b>On-mode power (Pon)</b> | 4 W |
|----------------------------|-----|

|                                 |                        |
|---------------------------------|------------------------|
| <b>Rated voltage, frequency</b> | AC 175-250 V, 50/60 Hz |
|---------------------------------|------------------------|

|                      |       |
|----------------------|-------|
| <b>Rated current</b> | 34 mA |
|----------------------|-------|

### Photometric parameters

|  |        |
|--|--------|
| <b>Useful luminous flux of the light source (Φuse)</b> | 380 Lm |
|--|--------|

|                                     |                    |
|-------------------------------------|--------------------|
| <b>Correlated color temperature</b> | 3000K (warm white) |
|-------------------------------------|--------------------|

|                   |      |
|-------------------|------|
| <b>Beam angle</b> | 240° |
|-------------------|------|

|                                    |         |
|------------------------------------|---------|
| <b>Color rendering index (CRI)</b> | Ra > 80 |
|------------------------------------|---------|

## VIDEX-E14-G45-4W-WW

### INDEX: VLE-G45e-04143

|                 |         |
|-----------------|---------|
| <b>Lifetime</b> | 20000 h |
|-----------------|---------|

|                      |       |
|----------------------|-------|
| <b>On/Off cycles</b> | 20000 |
|----------------------|-------|

|   |                    |
|---|--------------------|
| <b>Useful luminous flux of the light source reference</b> | in a sphere (360°) |
|---|--------------------|

### Additional information

|                             |        |
|-----------------------------|--------|
| <b>Place of application</b> | indoor |
|-----------------------------|--------|

|                                    |            |
|------------------------------------|------------|
| <b>Operating temperature range</b> | -20° +40°C |
|------------------------------------|------------|

|                        |                  |
|------------------------|------------------|
| <b>Mercury content</b> | Does not contain |
|------------------------|------------------|

|                           |      |
|---------------------------|------|
| <b>Ingress protection</b> | IP20 |
|---------------------------|------|

### Dimensions

|            |               |
|------------|---------------|
| <b>EAN</b> | 5904405540398 |
|------------|---------------|

|               |       |
|---------------|-------|
| <b>Height</b> | 82 mm |
|---------------|-------|

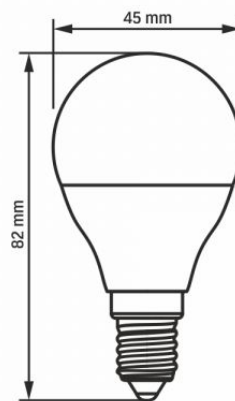
|              |       |
|--------------|-------|
| <b>Width</b> | 45 mm |
|--------------|-------|

|              |       |
|--------------|-------|
| <b>Depth</b> | 45 mm |
|--------------|-------|

|                  |         |
|------------------|---------|
| <b>Outer box</b> | 20 pcs. |
|------------------|---------|

**VIDEX®**

VIDEX-E14-G45-4W-WW

**INDEX: VLE-G45e-04143**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

