

VIDEX®

VIDEX-E27-A65-15W-CW

INDEX: VLE-A65e-15276

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



240°



Ra ≥ 80



20 000 h

ON/OFF
20 000

-20° +40°C



Not Dimmable



Free



IP20

WARRANTY 2 YEARS

COLD WHITE



6000K

Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kúlm valge.

Type of light source

Energy class of the light source	F
Dimmable	no

Electrical parameters

On-mode power (Pon)	15 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	130 mA

Photometric parameters

Useful luminous flux of the light source (Φ_{use})	1520 Lm
Correlated color temperature	6000K (cold white)
Beam angle	240°
Color rendering index (CRI)	Ra > 80

VIDEX-E27-A65-15W-CW

INDEX: VLE-A65e-15276

Lifetime	20000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20


Dimensions

EAN	5904405540329
Height	131 mm
Width	65 mm
Depth	65 mm
Outer box	20 pcs.

VIDEX®

VIDEX-E27-A65-15W-CW

INDEX: VLE-A65e-15276

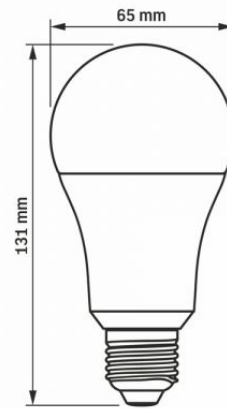

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

