

VIDEX®

VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-E27-A96-30W-NW
INDEX: VLE-A96-30274


330°



Ra ≥ 80



25 000 h

ON/OFF
20 000

-20° +40°C



Not Dimmable



CCT 4000K



No Flicker



Free



IP20

WARRANTY 2 YEARS

NEUTRAL WHITE

4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product Light source

Type of light source

Energy class of the light source F

Dimmable no

Technology LED

Electrical parameters

On-mode power (Pon) 30 W

Rated voltage, frequency AC 176-264 V, 50/60 Hz

Rated current 140 mA

Energy consumption in on-mode of the light source (kWh/1000h) 30

Photometric parameters

Useful luminous flux (Φuse) 3200 Lm

Correlated color temperature 4000K (neutral white)

Beam angle 330°

Color rendering index (CRI) Ra > 80

Lifetime 25000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Colour consistency in MacAdam ellipses (SDCM) <6 (4000K)

Flicker metric (Pst LM) ≤1

CRI Min Ra 80

CRI Max Ra 88

Additional information

Place of application indoor

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP20

Dimensions

EAN 5904405540190

Height 228 mm

Width 96 mm

Depth 96 mm

In the package 1 pc.

VIDEX[®]



VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274**Outer box**

20 pcs.



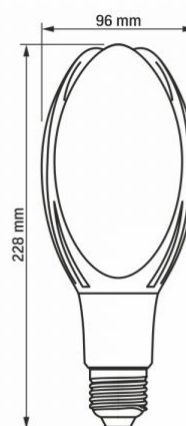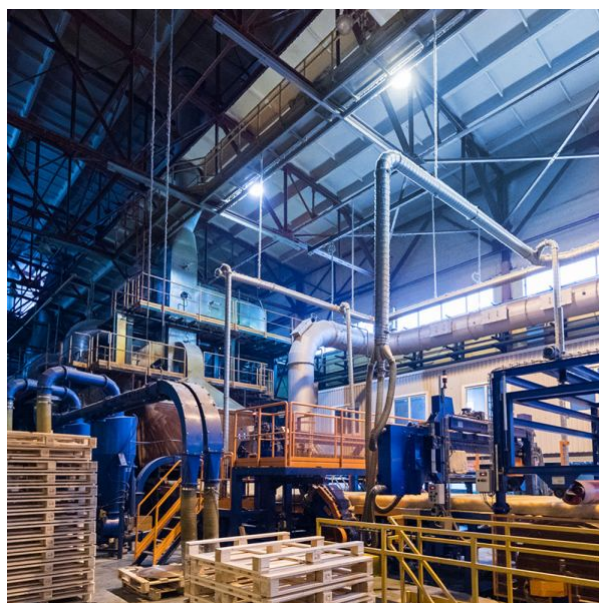

Signs marking goods**Packaging marking**

CE, Not suitable for use under moisture, Utilization



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product meets the requirements of EU directives
-  Not suitable for use under moisture
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
330°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Nominal lifetime (hours)
25 000 h
-  — Rated On/off cycles
20 000
-  — Operating temperatures range
-20° +40°C
-  — The product is incompatible with light regulators
Not Dimmable
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 4000K
-  — The flickering of the light does not exceed the permissible level
No Flicker
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm; no protection against moisture
IP20