

VIDEX®

VIDEX-E27-A96-30W-NW

INDEX: VLE-A96-30274

TECHNICAL CARD




LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

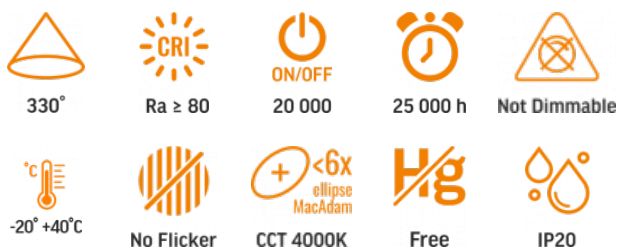VIDEX-E27-A96-30W-NW
INDEX: VLE-A96-30274


WARRANTY 2 YEARS

NEUTRAL WHITE

4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product Light source

Type of light source

Energy class of the light source	F
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	30 W
Rated voltage, frequency	AC 176-264 V, 50/60 Hz
Rated current	140 mA
Energy consumption in on-mode of the light source (kWh/1000h)	30

Photometric parameters

Useful luminous flux (Φuse)	3200 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	330°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Flicker metric (Pst LM)	≤1
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

Dimensions

EAN	5904405540190
In the package	1 pc.
Height	228 mm
Outer box	20 pcs.
Width	96 mm

VIDEX®

VIDEX-E27-A96-30W-NW



INDEX: VLE-A96-30274

Depth 96 mm

Signs marking goods





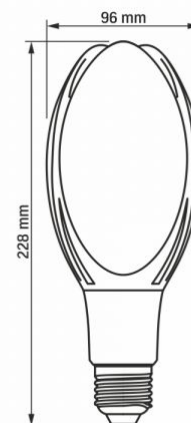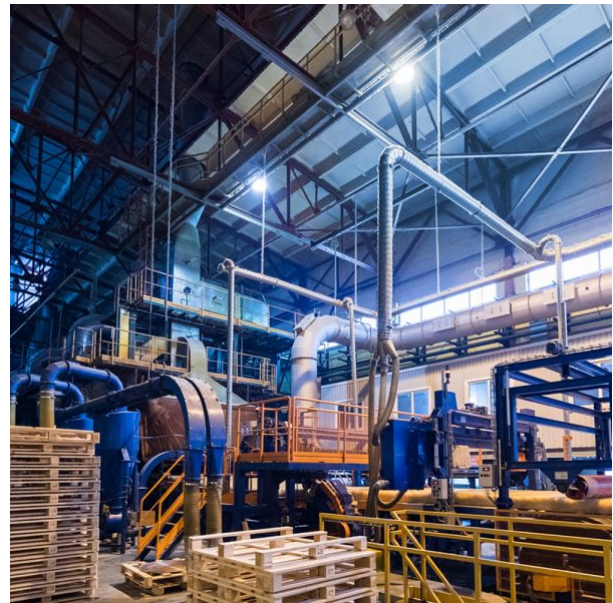









Packaging marking

CE, Not suitable for use under moisture, Utilization



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product meets the requirements of EU directives
-  Not suitable for use under moisture
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
330°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Rated On/off cycles
20 000
-  — Nominal lifetime (hours)
25 000 h
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +40°C
-  — The flickering of the light does not exceed the permissible level
No Flicker
-  — Colour consistency in MacAdam ellipses (SDCM)
CCT 4000K
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture.
Protection against solid objects larger than 12 mm; no protection against moisture
IP20