

VIDEX®

VIDEX-E27-G45-7W-WW

INDEX: VLE-G45e-07273

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



240°



Ra ≥ 80



20 000 h

ON/OFF
20 000

-20° +40°C



Not Dimmable



Free



IP20

WARRANTY 2 YEARS

WARM WHITE



3000K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe
valge / Тепло бяла / Bianco caldo.

Type of light source

| | |
|---|---|
| Energy class of the light source | F |
|---|---|

| | |
|-----------------|----|
| Dimmable | no |
|-----------------|----|

Electrical parameters

| | |
|----------------------------|-----|
| On-mode power (Pon) | 7 W |
|----------------------------|-----|

| | |
|---------------------------------|------------------------|
| Rated voltage, frequency | AC 175-250 V, 50/60 Hz |
|---------------------------------|------------------------|

| | |
|----------------------|-------|
| Rated current | 60 mA |
|----------------------|-------|

Photometric parameters

| | |
|--|--------|
| Useful luminous flux of the light source (Φuse) | 630 Lm |
|--|--------|

| | |
|-------------------------------------|--------------------|
| Correlated color temperature | 3000K (warm white) |
|-------------------------------------|--------------------|

| | |
|-------------------|------|
| Beam angle | 240° |
|-------------------|------|

| | |
|------------------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|------------------------------------|---------|

VIDEX-E27-G45-7W-WW

INDEX: VLE-G45e-07273

| | |
|---|--------------------|
| Lifetime | 20000 h |
| On/Off cycles | 20000 |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information

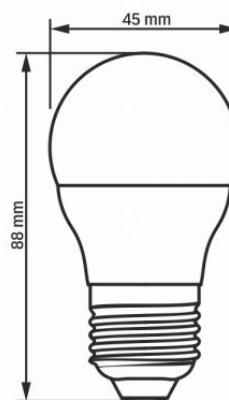
| | |
|------------------------------------|------------------|
| Place of application | indoor |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |

Dimensions

| | |
|------------------|---------------|
| EAN | 5904405540459 |
| Height | 88 mm |
| Width | 45 mm |
| Depth | 45 mm |
| Outer box | 20 pcs. |

VIDEX[®]

VIDEX-E27-G45-7W-WW

INDEX: VLE-G45e-07273

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

