

VIDEX®

VIDEX-E27-G95-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-G95FASD-04272

TECHNICAL CARD

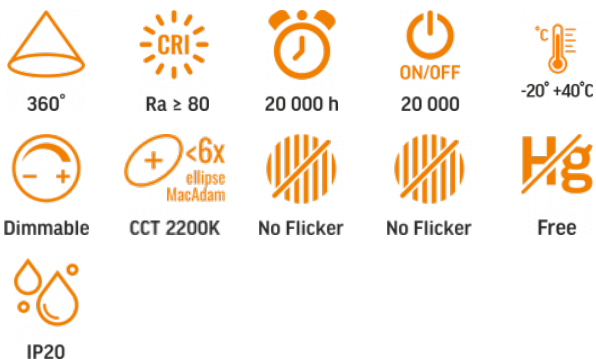


LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-E27-G95-4W-FIL-DIM-SPIRAL-AMBER-WW
INDEX: VLE-G95FASD-04272


WARRANTY 3 YEARS

WARM WHITE

2200K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

General parameters

Light source or containing product	Light source
Type of light source	
Energy class of the light source	G
Dimmable	yes
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	4 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	22 mA
Energy consumption in on-mode of the light source (kWh/1000h)	4
Displacement factor (cos φ1)	0.5
Survival factor	0.9

Photometric parameters

Useful luminous flux (Φuse)	300 Lm
Correlated color temperature	2200K (warm white)
Beam angle	360°
Color rendering index (CRI)	Ra > 80
Lifetime	20000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.494
Chromaticity coordinates (y)	0.409
R9 colour rendering index value	>0
The lumen maintenance factor	≥94.8%
Colour consistency in MacAdam ellipses (SDCM)	<6 (2200K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4

VIDEX[®]

VIDEX-E27-G95-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-G95FASD-04272

CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

Dimensions

EAN	5904405540176
Height	135 mm
Width	95 mm
Depth	95 mm
In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	55g

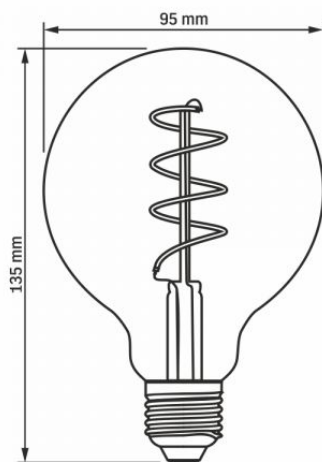
Signs marking goods

Packaging marking	Recycling of waste, CE, Not suitable for use under moisture, Utilization
-------------------	--



VIDEX[®]

VIDEX-E27-G95-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-G95FASD-04272

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.