

VIDEX®

VIDEX-E27-ST64-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-ST64FASD-04272

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



360°



Ra ≥ 80



20 000 h

ON/OFF
20 000

-20° +40°C



Dimmable



Free



IP20

WARRANTY 3 YEARS

WARM WHITE



2200K

Warm White / Ciepła biel / Tepla bila / Blanc chaud /
Tepla biela / Warm wit / Meleg feher / Topla bela / Topla
bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe
valge / Тепло бяла / Bianco caldo.

Type of light source

Energy class of the light source G

Dimmable yes

Electrical parameters

On-mode power (Pon) 4 W

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Rated current 22 mA

Photometric parameters

Useful luminous flux of the light source (Φ_{use}) 300 Lm

Correlated color temperature 2200K (warm white)

Beam angle 360°

Color rendering index (CRI) Ra > 80

VIDEX-E27-ST64-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-ST64FASD-04272

Lifetime 20000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Additional information

Place of application indoor

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP20

Dimensions

EAN 5904405540053

Height 146 mm

Width 64 mm


Depth 64 mm

Outer box 20 pcs.

VIDEX®

VIDEX-E27-ST64-4W-FIL-DIM-SPIRAL-AMBER-WW

INDEX: VLE-ST64FASD-04272

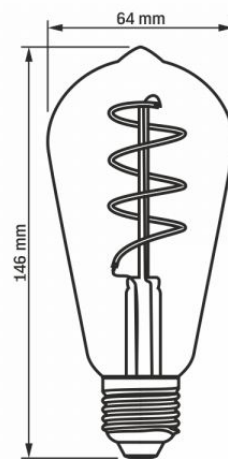

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 22.01.2025