

TECHNICAL CARD



LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 2 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

| | |
|------------------------------------|--------------------|
| Light source or containing product | Containing product |
| Light source replaceable | by the producer |

Type of light source

| | |
|---|-----|
| Energy efficiency class of the contained light source | F |
| Dimmable | no |
| Technology | LED |

Electrical parameters

| | |
|--------------------------|------------------------|
| On-mode power (Pon) | 15 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 120 mA |

VIDEX-BULKHEAD-LED-DANA-15W-NW

INDEX: VLE-BH120-155

| | |
|---------------------------------|----------------|
| Input interface | Terminal block |
| Electric shock protection class | II |

Photometric parameters

| | |
|---|-----------------------|
| Useful luminous flux of the contained light source (Φuse) | 1550 Lm |
| Correlated color temperature | 5000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 25000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| CRI Min | Ra 80 |
| CRI Max | Ra 88 |

Additional information

| | |
|--|-----------------------------|
| Place of installation | Ceiling, Flat surface, Wall |
| Place of application | indoor, outdoor |
| Impact protection | IK07 |
| Housing colour | Gray |
| Diffuser material | Polycarbonate (PC) |
| Minimum distance from the illuminated object | 0.5 m |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |

VIDEX®

VIDEX-BULKHEAD-LED-DANA-15W-NW

INDEX: VLE-BH120-155

| | |
|---------------------------|------|
| Ingress protection | IP65 |
|---------------------------|------|

| | |
|-------------------------|---------|
| Housing material | Plastic |
|-------------------------|---------|

Dimensions

| | |
|------------|---------------|
| EAN | 5904405540954 |
|------------|---------------|

| | |
|-----------------------|-------|
| In the package | 1 pc. |
|-----------------------|-------|

| | |
|---------------|--------|
| Height | 215 mm |
|---------------|--------|

| | |
|------------------|---------|
| Outer box | 24 pcs. |
|------------------|---------|

| | |
|--------------|--------|
| Width | 125 mm |
|--------------|--------|

| | |
|--------------|-------|
| Depth | 59 mm |
|--------------|-------|



Signs marking goods

Packaging marking

Recycling of
waste, CE,
Utilization







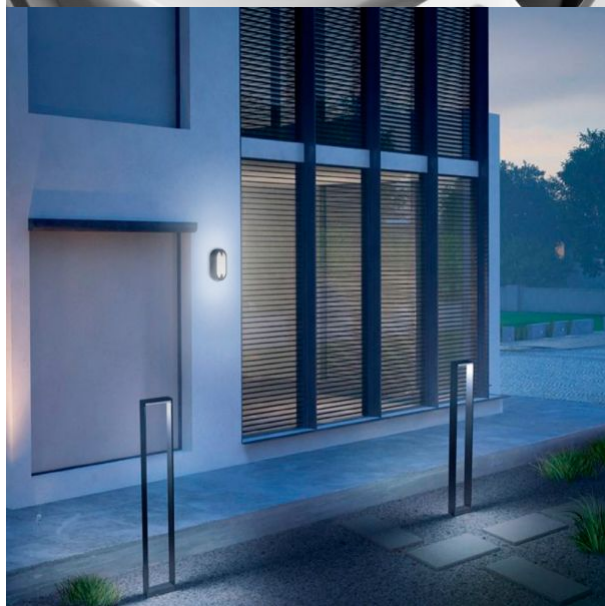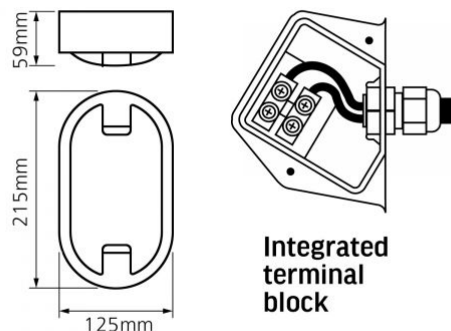












INDEX: VLE-BH120-155



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Minimum distance from the illuminated object
0,5 m
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
ON/OFF
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)
IK07
-  — Nominal lifetime (hours)
25 000 h
-  — The product does not emit ultraviolet light
Free
-  — The product is incompatible with light regulators
Not Dimmable
-  — Operating temperatures range
-20° +40°C
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions
IP65