

TECHNICAL CARD



LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF
20 000

IK07



Free



-20° +40°C



Not Dimmable



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtalno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutalus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable by the producer

Type of light source

Energy class of the light source F

Dimmable no

Electrical parameters

On-mode power (Pon) 15 W

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Rated current 120 mA

Input interface Terminal block

Electric shock protection class II

VIDEX-BULKHEAD-LED-DANA-15W-NW

INDEX: VLE-BH120-155

Photometric parameters

Useful luminous flux of the contained light source (Φuse) 1600 Lm

Correlated color temperature 5000K (neutral white)

Beam angle 120°

Color rendering index (CRI) Ra > 80

Lifetime 25000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Additional information

Place of installation Ceiling, Flat surface, Wall

Place of application indoor, outdoor

Impact protection IK07

Housing colour Gray

Minimum distance from the illuminated object 0.5 m

Diffuser material Polycarbonate (PC)

Ultraviolet radiation no

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP65

Housing material Plastic

Dimensions

EAN 5904405540954

VIDEX®




VIDEX-BULKHEAD-LED-DANA-15W-NW

INDEX: VLE-BH120-155

Height	215 mm
Width	125 mm
Depth	59 mm
Outer box	24 pcs.



INDEX: VLE-BH120-155

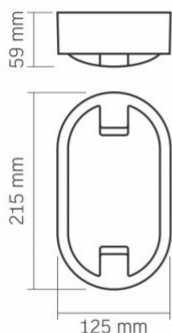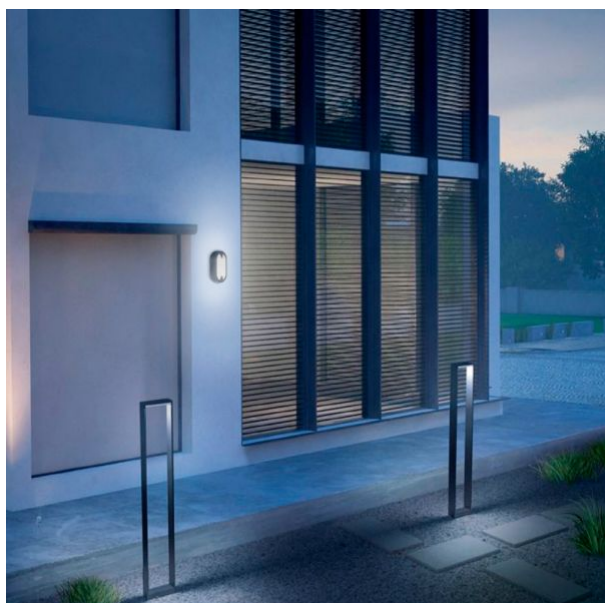

**Integrated
terminal
block**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Minimum distance from the illuminated object



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



25 000 h

Nominal lifetime (hours)



ON/OFF
20 000

Rated On/off cycles



IK07

The product withstands a medium impact (e.g., from a blunt object)



Free

The product does not emit ultraviolet light



-20° +40°C

Operating temperatures range



Not Dimmable

The product is incompatible with light regulators



Free

The product does not contain mercury



IP65

Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions