

TECHNICAL CARD



LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF
20 000

IK07



Free



-20° +40°C



Not Dimmable



Free



IP65

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable by the producer

Type of light source

Energy class of the light source F

Dimmable no

Electrical parameters

On-mode power (Pon) 11 W

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Rated current 95 mA

Input interface Terminal block

Electric shock protection class II

VIDEX-BULKHEAD-LED-GALA-11W-NW

INDEX: VLE-BHFO-115

Photometric parameters

Useful luminous flux of the contained light source (Φuse) 1200 Lm

Correlated color temperature 5000K (neutral white)

Beam angle 120°

Color rendering index (CRI) Ra > 80

Lifetime 25000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Additional information

Place of installation Ceiling, Flat surface, Wall

Place of application indoor, outdoor

Impact protection IK07

Housing colour White

Minimum distance from the illuminated object 0.5 m

Diffuser material Polycarbonate (PC)

Ultraviolet radiation no

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP65

Housing material Plastic

Dimensions

EAN 5904405540947

VIDEX[®]


VIDEX-BULKHEAD-LED-GALA-11W-NW

INDEX: VLE-BHFO-115

Height	190 mm
Width	113 mm
Depth	40 mm
Outer box	24 pcs.






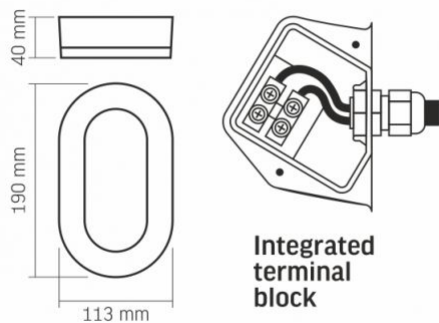










INDEX: VLE-BHFO-115



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Minimum distance from the illuminated object
0,5 m
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  — Rated beam angle
120°
-  — Ra > 80 - color rendering index
Ra ≥ 80
-  — Nominal lifetime (hours)
25 000 h
-  — Rated On/off cycles
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)
IK07
-  — The product does not emit ultraviolet light
Free
-  — Operating temperatures range
-20° +40°C
-  — The product is incompatible with light regulators
Not Dimmable
-  — The product does not contain mercury
Free
-  — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions
IP65