

## TECHNICAL CARD



LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

## VIDEX-BULKHEAD-LED-GALA-11W-NW

### INDEX: VLE-BHFO-115



## WARRANTY 2 YEARS

### NEUTRAL WHITE



### 5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

<b>Light source or containing product</b>	Containing product
<b>Light source replaceable</b>	by the producer
<b>Type of light source</b>	
<b>Energy efficiency class of the contained light source</b>	F
<b>Dimmable</b>	no
<b>Directional (DLS) or non-directional (NDLS) light source</b>	NDLS
<b>Connected light source (cls)</b>	no
<b>Color-tunable light source</b>	no
<b>Mains (MLS) or non-mains (NMLS) light source</b>	MLS

<b>High luminance light source</b>	No
<b>Anti-glare shield</b>	No
<b>Technology</b>	LED

## Electrical parameters

<b>On-mode power (Pon)</b>	11 W
<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz
<b>Rated current</b>	95 mA
<b>Input interface</b>	Terminal block
<b>Electric shock protection class</b>	II
<b>Displacement factor (cos φ1)</b>	0.7
<b>Survival factor</b>	1
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	11

## Photometric parameters

<b>Useful luminous flux of the contained light source (Φuse)</b>	1150 Lm
<b>Correlated color temperature</b>	5000K (neutral white)
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	25000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
<b>Chromaticity coordinates (x)</b>	0.35
<b>Chromaticity coordinates (y)</b>	0.36

## INDEX: VLE-BHFO-115

<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥95.8%
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 89

## Additional information

<b>Place of installation</b>	Ceiling, Flat surface, Wall
<b>Place of application</b>	indoor, outdoor
<b>Impact protection</b>	IK07
<b>Housing colour</b>	White
<b>Diffuser material</b>	Polycarbonate (PC)
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Plastic

## Dimensions

<b>EAN</b>	5904405540947
<b>In the package</b>	1 pc.


<b>Outer box</b>	24 pcs.
<b>Height</b>	190 mm
<b>Width</b>	113 mm
<b>Depth</b>	40 mm
<b>Unit nett weight</b>	220g

## Signs marking goods

### Packaging marking

Recycling of waste, CE, Utilization

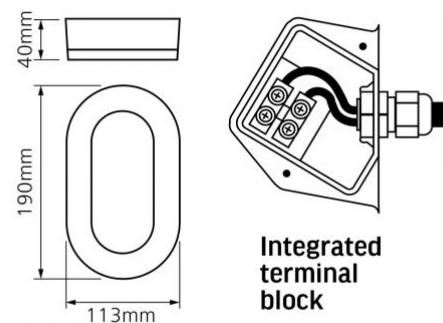






















**VIDEX<sup>®</sup>****VIDEX-BULKHEAD-LED-GALA-11W-NW****INDEX: VLE-BHFO-115**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

## INDEX: VLE-BHFO-115

-  The product must be used indoors
-  The product must be used outdoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Minimum distance from the illuminated object  
0,5 m
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index  
Ra ≥ 80
-  — Rated On/off cycles  
ON/OFF  
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)  
IK07
-  — Nominal lifetime (hours)  
25 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +40°C
-  — The flickering of the light does not exceed the permissible level  
No Flicker
-  — The product has minimal flickering, which should not cause discomfort or danger  
No Flicker
-  — Colour consistency in MacAdam ellipses (SDCM)  
CCT 5000K
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture.  
The product has full protection against dust and water jets from all directions  
IP65