


TECHNICAL CARD



LED Bulkhead Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

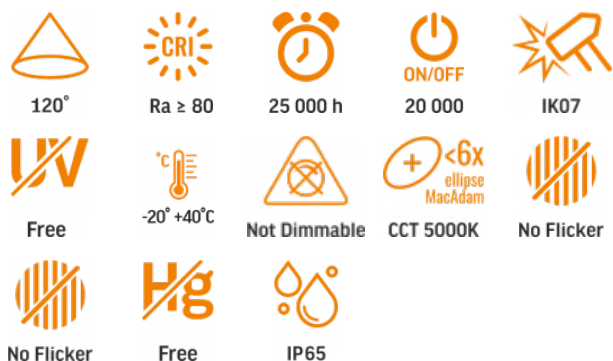

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable by the producer

Type of light source

Energy class of the light source	F
Dimmable	no
Directional or non-directional light source	NDLS
Mains or non-mains light source	MLS
Colour-tuneable light source (CTLS)	no
Technology	LED

Electrical parameters

On-mode power (Pon) 24 W

INDEX: VLE-BHFR-245

Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	210 mA
Input interface	Terminal block
Electric shock protection class	II
Displacement factor (cos φ1)	0.7
Survival factor	1

Photometric parameters

Useful luminous flux of the light source (Φuse)	2600 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	25000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.35
Chromaticity coordinates (y)	0.36
R9 colour rendering index value	>0
The lumen maintenance factor	≥95.8%
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
CRI Min	Ra 80
CRI Max	Ra 88

INDEX: VLE-BHFR-245

Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	White
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Plastic


Dimensions

EAN	5904405542309
Height	320 mm
Width	320 mm
Depth	50 mm
Outer box	10 pcs.
In the package	1 pc.

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

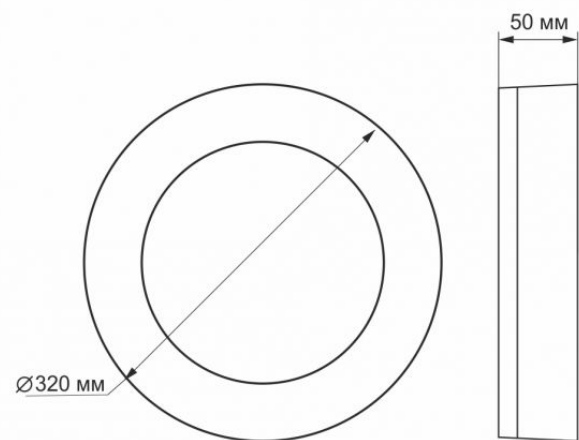

VIDEX®**VIDEX-BULKHEAD-LED-LENA-24W-NW****INDEX: VLE-BHFR-245**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 22.12.2024