


## TECHNICAL CARD



LED Bulkhead Light with motion detector

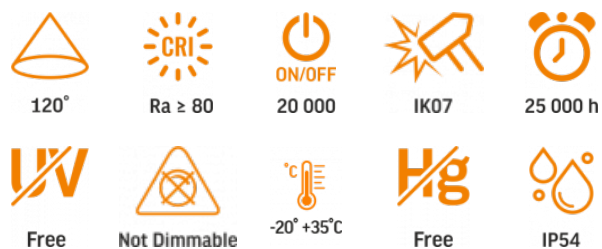

## WARRANTY 2 YEARS

### NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer

### Type of light source

Dimmable	no
Technology	LED
Energy efficiency class of the contained light source	F

### Electrical parameters

On-mode power (Pon)	11 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	95 mA

## VIDEX-BULKHEAD-LED-PIR-KIRA-11W-NW

### INDEX: VLE-BHR-115W-SP

Input interface	Free wire ends
Electric shock protection class	II

### Photometric parameters

Useful luminous flux of the contained light source ( $\Phi_{use}$ )	1200 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Sensor light threshold	25 Lx
CRI Min	Ra 80
CRI Max	Ra 88

### Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	White
Diffuser material	Polycarbonate (PC)
Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Motion sensor	yes

**INDEX: VLE-BHR-115W-SP**

<b>Sensor type</b>	PIR
<b>Sensor detection angle</b>	120°
<b>Sensor time delay</b>	60 s
<b>Sensor detection distance</b>	≤6 m
<b>Operating temperature range</b>	-20° +35°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP54
<b>Housing material</b>	Plastic



**Dimensions**

<b>EAN</b>	5904405540978
<b>Height</b>	170 mm
<b>Depth</b>	50 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Width</b>	170 mm

**Signs marking goods**

<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------

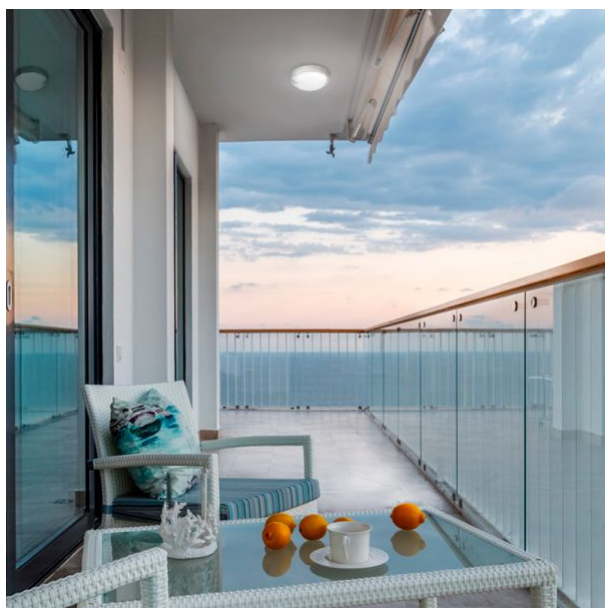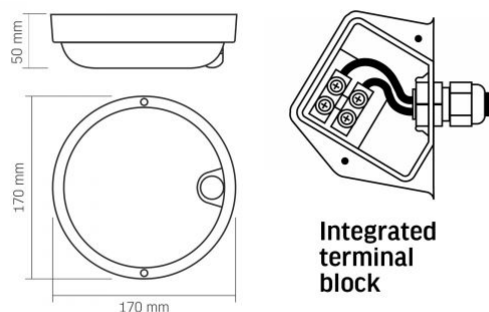

**INDEX: VLE-BHR-115W-SP**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



The product must be used outdoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Minimum distance from the illuminated object  
0,5 m



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Rated beam angle  
120°



Ra > 80 - color rendering index



Rated On/off cycles



The product withstands a medium impact (e.g., from a blunt object)  
IK07



Nominal lifetime (hours)  
25 000 h



The product does not emit ultraviolet light  
Free



The product is incompatible with light regulators  
Not Dimmable



Operating temperatures range  
-20° +35°C



The product does not contain mercury  
Free



Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing  
IP54