


## TECHNICAL CARD




LED Bulkhead Light with motion detector



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

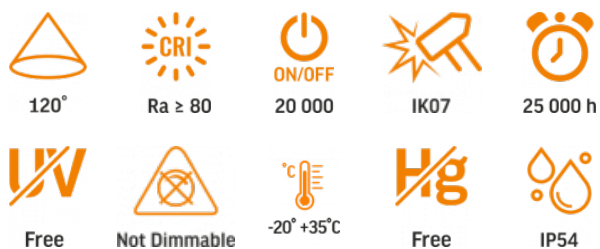

## WARRANTY 2 YEARS

### NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

Light source or containing product	Containing product
Light source replaceable	by the producer

## Type of light source

Energy efficiency class of the contained light source	F
Dimmable	no
Technology	LED

## Electrical parameters

On-mode power (Pon)	11 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	95 mA

## VIDEX-BULKHEAD-LED-PIR-KIRA-11W-NW

### INDEX: VLE-BHR-115W-SP

Input interface	Free wire ends
Electric shock protection class	II

## Photometric parameters

Useful luminous flux of the contained light source ( $\Phi_{use}$ )	1200 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	25000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Sensor light threshold	25 Lx
CRI Min	Ra 80
CRI Max	Ra 88

## Additional information

Place of installation	Ceiling, Flat surface, Wall
Place of application	indoor, outdoor
Impact protection	IK07
Housing colour	White
Diffuser material	Polycarbonate (PC)
Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Motion sensor	yes

# VIDEX®

## VIDEX-BULKHEAD-LED-PIR-KIRA-11W-NW

### INDEX: VLE-BHR-115W-SP

<b>Sensor type</b>	PIR
<b>Sensor detection angle</b>	120°
<b>Sensor time delay</b>	60 s
<b>Sensor detection distance</b>	≤6 m
<b>Operating temperature range</b>	-20° +35°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP54
<b>Housing material</b>	Plastic

### Dimensions



<b>EAN</b>	5904405540978
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Height</b>	170 mm
<b>Width</b>	170 mm
<b>Depth</b>	50 mm

### Signs marking goods

<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------





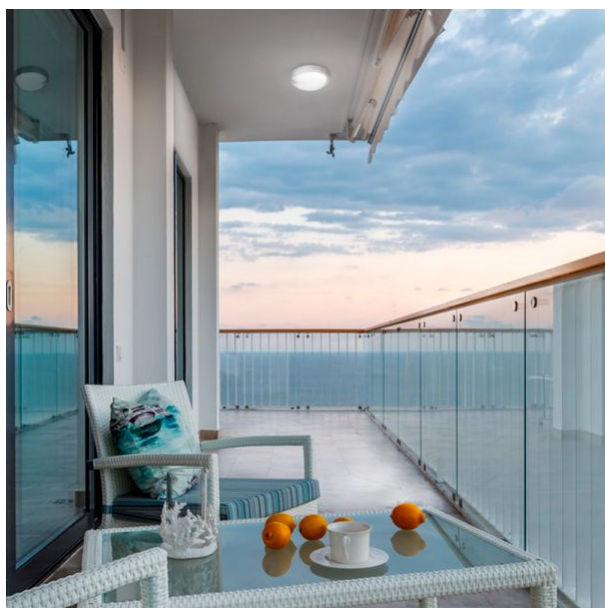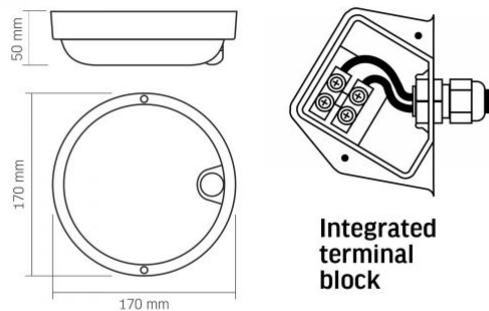









## INDEX: VLE-BHR-115W-SP



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11, 30-732 Krakow, Poland.

-  The product must be used indoors
-  The product must be used outdoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  Minimum distance from the illuminated object  
0,5 m
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle  
120°
-  — Ra > 80 - color rendering index  
Ra > 80
-  — Rated On/off cycles  
20 000
-  — The product withstands a medium impact (e.g., from a blunt object)  
IK07
-  — Nominal lifetime (hours)  
25 000 h
-  — The product does not emit ultraviolet light  
Free
-  — The product is incompatible with light regulators  
Not Dimmable
-  — Operating temperatures range  
-20° +35°C
-  — The product does not contain mercury  
Free
-  — Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing  
IP54