

## TECHNICAL CARD



LED Ceiling Fixture



# VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF  
20 000

Free



Not Dimmable



Free



IP44

## WARRANTY 2 YEARS

### NEUTRAL WHITE



### 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

<b>Control gear replaceable</b>	by the producer
---------------------------------	-----------------

<b>Light source replaceable</b>	by the producer
---------------------------------	-----------------

## Type of light source

<b>Energy class of the light source</b>	F
---	---

<b>Dimmable</b>	no
-----------------	----

## Electrical parameters

<b>On-mode power (Pon)</b>	24 W
----------------------------	------

<b>Rated voltage, frequency</b>	AC 176-264 V, 50/60 Hz
---------------------------------	------------------------

<b>Rated current</b>	200 mA
----------------------	--------

<b>Input interface</b>	Terminal block
------------------------	----------------

<b>Electric shock protection class</b>	I
--	---

## VIDEX-MILA-24W-NW

### INDEX: VLE-CLR-244R

## Photometric parameters

<b>Useful luminous flux of the light source (Φuse)</b>	2500 Lm
--	---------

<b>Correlated color temperature</b>	4000K (neutral white)
-------------------------------------	--------------------------

<b>Beam angle</b>	120°
-------------------	------

<b>Color rendering index (CRI)</b>	Ra > 80
------------------------------------	---------

<b>Lifetime</b>	25000 h
-----------------	---------

<b>On/Off cycles</b>	20000
----------------------	-------

<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
---	-----------------------

## Additional information

<b>Place of installation</b>	Ceiling, Wall
------------------------------	---------------

<b>Place of application</b>	indoor
-----------------------------	--------

<b>Housing colour</b>	White
-----------------------	-------

<b>Diffuser material</b>	PMMA
--------------------------	------

<b>Ultraviolet radiation</b>	no
------------------------------	----

<b>Operating temperature range</b>	-20° +40°C
------------------------------------	------------

<b>Mercury content</b>	Does not contain
------------------------	------------------

<b>Ingress protection</b>	IP44
---------------------------	------

<b>Housing material</b>	Plastic
-------------------------	---------

## Dimensions

<b>EAN</b>	5904405540565
------------	---------------

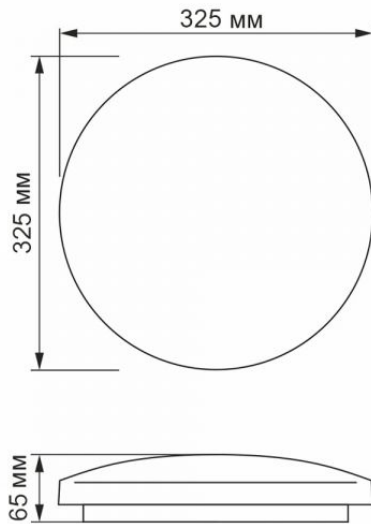
<b>Height</b>	325 mm
---------------	--------

<b>Width</b>	325 mm
--------------	--------

**VIDEX<sup>®</sup>**

VIDEX-MILA-24W-NW

**INDEX: VLE-CLR-244R****Depth** 65 mm**Outer box** 10 pcs.

**INDEX: VLE-CLR-244R**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.