

TECHNICAL CARD



LED Ceiling Fixture



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF
20 000

Free



-20° +40°C



Not Dimmable



Free



IP44

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

| | |
|--------------------------|-----------------|
| Control gear replaceable | by the producer |
| Light source replaceable | by the producer |

Type of light source

| | |
|----------------------------------|----|
| Energy class of the light source | F |
| Dimmable | no |

Electrical parameters

| | |
|---------------------------------|------------------------|
| On-mode power (Pon) | 48 W |
| Rated voltage, frequency | AC 176-264 V, 50/60 Hz |
| Rated current | 230 mA |
| Input interface | Terminal block |
| Electric shock protection class | I |

VIDEX-MILA-48W-NW

INDEX: VLE-CLR-484R

Photometric parameters

| | |
|--|-----------------------|
| Useful luminous flux of the light source (Φuse) | 5160 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime | 25000 h |
| On/Off cycles | 20000 |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information

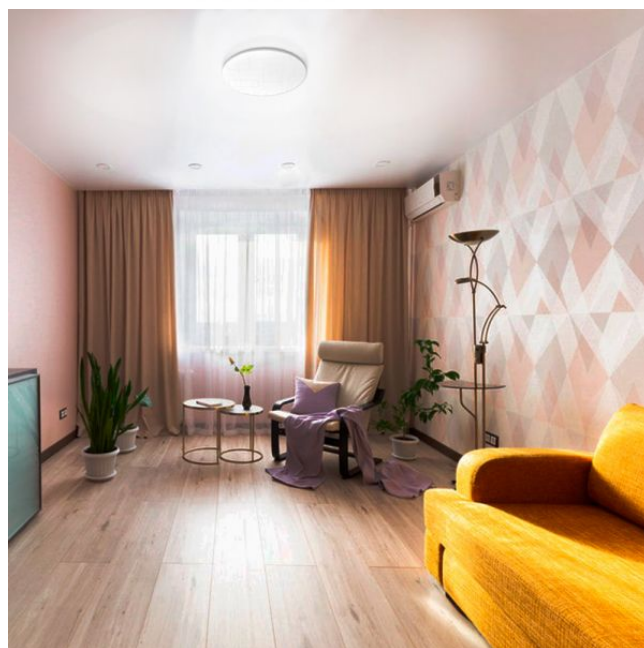
| | |
|-----------------------------|------------------|
| Place of installation | Ceiling, Wall |
| Place of application | indoor |
| Housing colour | White |
| Diffuser material | PMMA |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP44 |
| Housing material | Plastic |

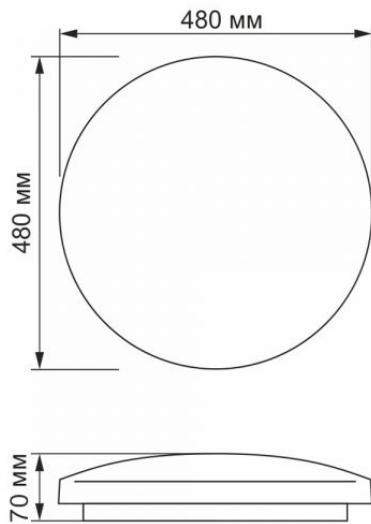
Dimensions

| | |
|--------|---------------|
| EAN | 5904405540572 |
| Height | 480 mm |
| Width | 480 mm |

VIDEX[®]

VIDEX-MILA-48W-NW

INDEX: VLE-CLR-484R**Depth** 70 mm**Outer box** 10 pcs.

INDEX: VLE-CLR-484R

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.