

TECHNICAL CARD



LED Ceiling Fixture



VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF
20 000

Free



-20° +40°C



Not Dimmable



Free



IP44

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevrnalno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Control gear replaceable	by the producer
--------------------------	-----------------

Light source replaceable	by the producer
--------------------------	-----------------

Type of light source

Energy class of the light source	F
----------------------------------	---

Dimmable	no
----------	----

Electrical parameters

On-mode power (Pon)	48 W
---------------------	------

Rated voltage, frequency	AC 176-264 V, 50/60 Hz
--------------------------	------------------------

Rated current	230 mA
---------------	--------

Input interface	Terminal block
-----------------	----------------

VIDEX-ZOYA-48W-NW

INDEX: VLE-CLR-484M

Electric shock protection class	I
---------------------------------	---

Photometric parameters

Useful luminous flux of the contained light source (Φuse)	5160 Lm
---	---------

Correlated color temperature	4000K (neutral white)
------------------------------	-----------------------

Beam angle	120°
------------	------

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	25000 h
----------	---------

On/Off cycles	20000
---------------	-------

Useful luminous flux of the light source reference	in a sphere (360°)
--	--------------------

Additional information

Place of installation	Ceiling, Wall
-----------------------	---------------

Place of application	indoor
----------------------	--------

Housing colour	White
----------------	-------

Diffuser material	PMMA
-------------------	------

Ultraviolet radiation	no
-----------------------	----

Operating temperature range	-20° +40°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP44
--------------------	------

Housing material	Plastic
------------------	---------


Dimensions

EAN	5904405540602
-----	---------------


Height	480 mm
--------	--------

VIDEX[®]

VIDEX-ZOYA-48W-NW

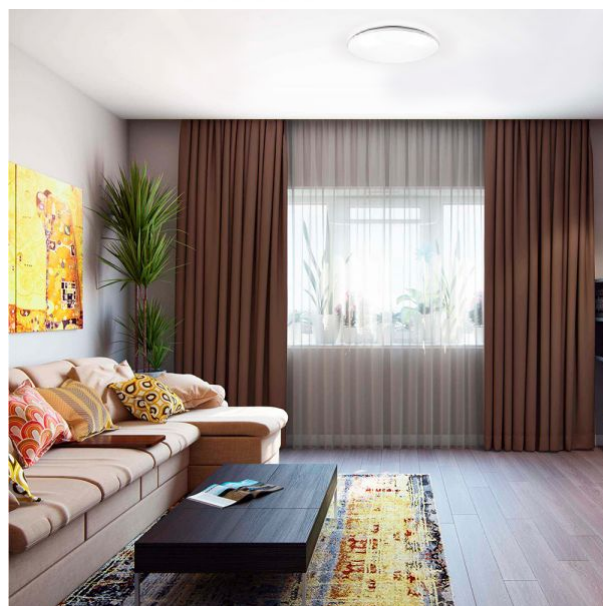INDEX: VLE-CLR-484M**Width** 480 mm**Depth** 70 mm**Outer box** 5 pcs.

INDEX: VLE-CLR-484M

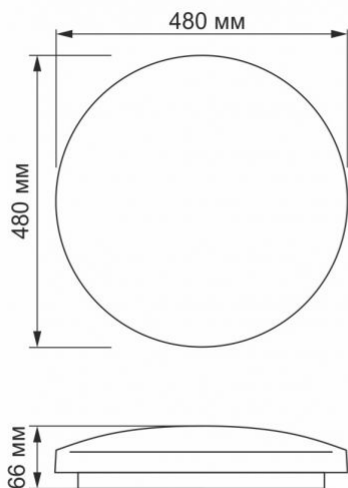

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used indoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



120°

— Rated beam angle



Ra ≥ 80

— Ra > 80 - color rendering index



25 000 h

— Nominal lifetime (hours)



20 000

— Rated On/off cycles



Free

— The product does not emit ultraviolet light



-20° +40°C

— Operating temperatures range



Not Dimmable

— The product is incompatible with light regulators



Free

— The product does not contain mercury



IP44

— Class of protection against dust and moisture. Protection against solid foreign objects with a diameter of 1 mm and greater and against water splashes