

TECHNICAL CARD



LED Ceiling Fixture



VIDEX®



120°



Ra ≥ 80



25 000 h

ON/OFF
20 000

Free



Not Dimmable



Free



IP44

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable by the producer

Light source replaceable by the producer

Type of light source

Energy class of the light source F

Dimmable no

Electrical parameters

On-mode power (Pon) 48 W

Rated voltage, frequency AC 176-264 V, 50/60 Hz

Rated current 230 mA

Input interface Terminal block

Electric shock protection class I

VIDEX-ZOYA-48W-NW

INDEX: VLE-CLR-484M

Photometric parameters

Useful luminous flux of the light source (Φuse) 5160 Lm

Correlated color temperature 4000K (neutral white)

Beam angle 120°

Color rendering index (CRI) Ra > 80

Lifetime 25000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a sphere (360°)

Additional information

Place of installation Ceiling, Wall

Place of application indoor

Housing colour White

Diffuser material PMMA

Ultraviolet radiation no

Operating temperature range -20° +40°C

Mercury content Does not contain

Ingress protection IP44

Housing material Plastic

Dimensions

EAN 5904405540602

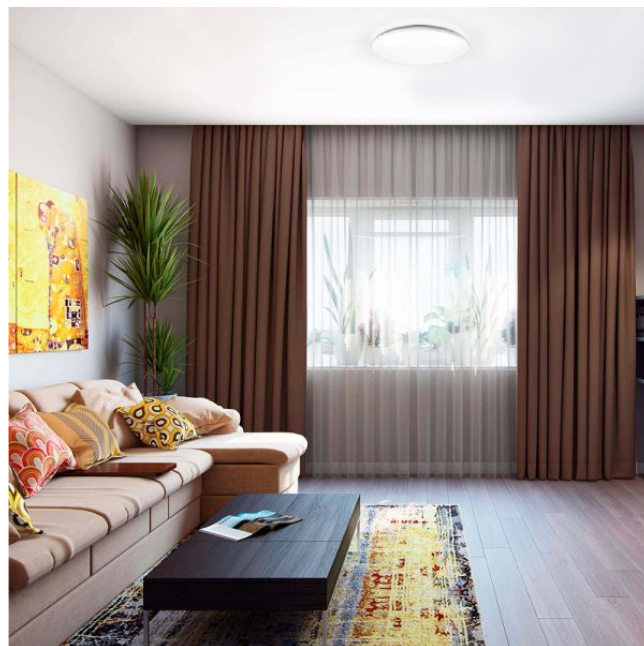
Height 480 mm

Depth 70 mm

VIDEX[®]

VIDEX-ZOYA-48W-NW

INDEX: VLE-CLR-484M

Width 480 mm**Outer box** 5 pcs.

INDEX: VLE-CLR-484M

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

