

## TECHNICAL CARD



LED Ceiling Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX<sup>®</sup>

## VIDEX-LED-CEILING-DL3S-24W-BLACK-4K

### INDEX: VL-DL3S-244B

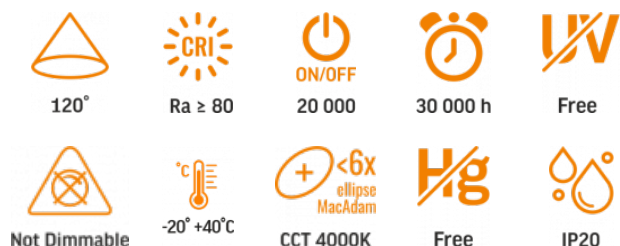

## WARRANTY 2 YEARS



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

Light source or containing product	Containing product
Control gear replaceable	by the producer
Light source replaceable	by the producer

## Type of light source

Energy efficiency class of the contained light source	E
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	NMLS

High luminance light source	No
Anti-glare shield	No
Technology	LED

## Electrical parameters

On-mode power (Pon)	22 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	218 mA
Input interface	Free wire ends
Electric shock protection class	II
Displacement factor (cos φ1)	-
Survival factor	1
Energy consumption in on-mode of the light source (kWh/1000h)	24

## Photometric parameters

Useful luminous flux of the contained light source (Φuse)	2900 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38

### INDEX: VL-DL3S-244B

<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥96%
<b>Flicker metric (Pst LM)</b>	-
<b>Stroboscopic effect metric (SVM)</b>	-
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (4000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

<b>Height</b>	292 mm
<b>Outer box</b>	12 pcs.
<b>Width</b>	292 mm
<b>Depth</b>	28 mm
<b>Unit nett weight</b>	820g

### Additional information

<b>Place of installation</b>	Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	Black
<b>Diffuser material</b>	Polycarbonate (PC), Polypropylene (PP), Polystyrene (PS)
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	PC

### Dimensions

<b>EAN</b>	4820246485227
<b>In the package</b>	1 pc.

### Signs marking goods

#### Packaging marking

Recycling of waste, CE, Utilization




**VIDEX<sup>®</sup>**

VIDEX-LED-CEILING-DL3S-24W-BLACK-4K


**INDEX: VL-DL3S-244B**

### INDEX: VL-DL3S-244B

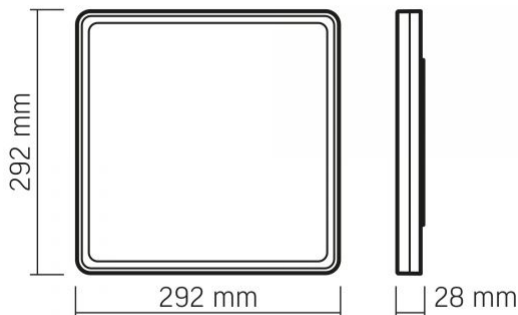

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

	The product must be used indoors
	Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
	Minimum distance from the illuminated object 0,5 m
	The product can be installed and used in/on normally flammable surfaces
	Waste recycling after the end of the product's service life
	The product meets the requirements of EU directives
	It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
	— Rated beam angle 120°
	— Ra > 80 - color rendering index Ra > 80
	— Rated On/off cycles 20 000
	— Nominal lifetime (hours) 30 000 h
	— The product does not emit ultraviolet light Free
	— The product is incompatible with light regulators Not Dimmable
	— Operating temperatures range -20° +40°C
	— Colour consistency in MacAdam ellipses (SDCM) CCT 4000K
	— The product does not contain mercury Free
	— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture IP20