

VIDEX®

VIDEX-DESK-LAMP-RIO-BLACK

INDEX: VLE-TF05B


TECHNICAL CARD



LED Dimmable Desk Lamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

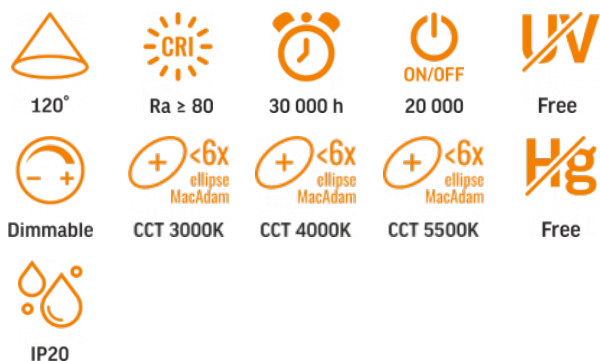

WARRANTY 2 YEARS

General parameters

Control gear replaceable	yes
Light source replaceable	no
Light source or containing product	Containing product

Type of light source

Energy class of the light source	F
Dimmable	5-step
Directional or non-directional light source	NDLS
Mains or non-mains light source	NMLS
Connected light source (cls)	no
Colour-tuneable light source (CTLS)	no
Technology	LED

Electrical parameters

On-mode power (Pon)	4.5 W
---------------------	-------

VIDEX-DESK-LAMP-RIO-BLACK

INDEX: VLE-TF05B

Rated voltage, frequency	AC 100-240 V, 50/60 Hz
Rated current	45 mA
Input interface	AC adapter
Electric shock protection class	II
Displacement factor (cos φ1)	-
Survival factor	1
Standby Power (Psb)	0.4 W

Photometric parameters

Useful luminous flux of the light source (Φuse)	490 Lm
Correlated color temperature	5500K (cold white), 4000K (neutral white), 3000K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (3000K), <6 (4000K), <6 (5500K)
Flicker metric (Pst LM)	-

VIDEX®

VIDEX-DESK-LAMP-RIO-BLACK

INDEX: VLE-TF05B

Stroboscopic effect metric (SVM)	-
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Place of installation	Desk
Place of application	indoor
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-10° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

Dimensions

EAN	5904405541272
Height	329 mm
Width	150 mm
Depth	150 mm
Outer box	16 pcs.
In the package	1 pc.

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------



VIDEX[®]



VIDEX-DESK-LAMP-RIO-BLACK

INDEX: VLE-TF05B

VIDEX®

VIDEX-DESK-LAMP-RIO-BLACK

INDEX: VLE-TF05B

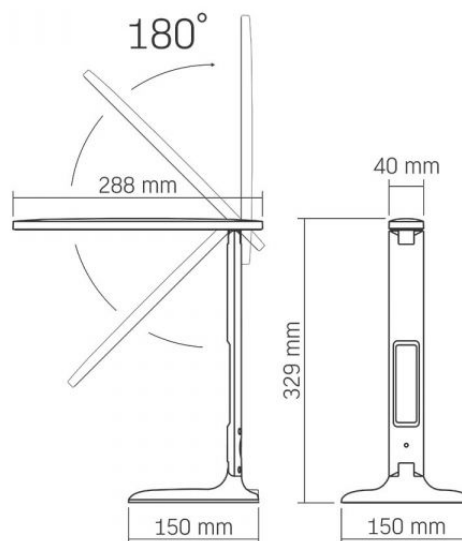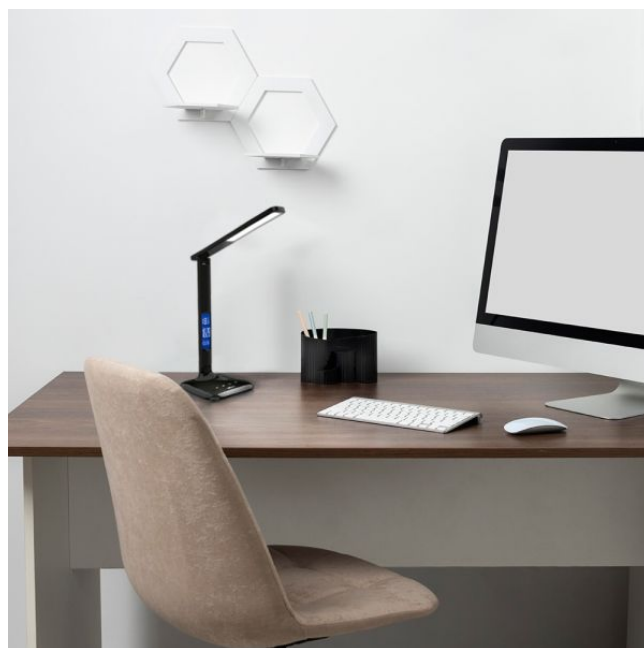

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 14.11.2024