


TECHNICAL CARD



LED Dimmable Floor Lamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

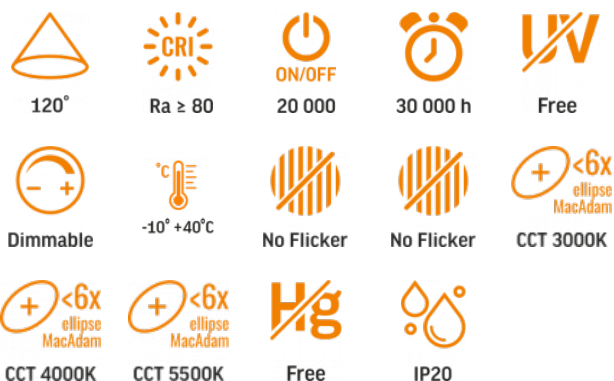INDEX: VLE-TF07B

WARRANTY 2 YEARS
General parameters

| | |
|------------------------------------|--------------------|
| Light source or containing product | Containing product |
| Control gear replaceable | yes |
| Light source replaceable | no |

Type of light source

| | |
|--|--------|
| Dimmable | 5-step |
| Directional (DLS) or non-directional (NDLS) light source | NDLS |
| Connected light source (cls) | no |
| Color-tunable light source | no |
| Mains (MLS) or non-mains (NMLS) light source | NMLS |
| High luminance light source | No |
| Anti-glare shield | No |
| Technology | LED |
| Energy efficiency class of the contained light source | F |

Electrical parameters

| | |
|---|------------------------|
| On-mode power (Pon) | 9.5 W |
| Rated voltage, frequency | AC 100-240 V, 50/60 Hz |
| Rated current | 105 mA |
| Input interface | AC adapter |
| Electric shock protection class | II |
| Displacement factor (cos φ1) | 0.9 |
| Survival factor | 1 |
| Energy consumption in on-mode of the light source (kWh/1000h) | 12 |
| Standby Power (Psb) | 0.4 W |

Photometric parameters

| | |
|---|---|
| Useful luminous flux of the contained light source (Φuse) | 1280 Lm |
| Correlated color temperature | 5500K (cold white), 4000K (neutral white), 3000K (warm white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 30000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| Chromaticity coordinates (x) | 0.38 |
| Chromaticity coordinates (y) | 0.38 |
| R9 colour rendering index value | >0 |
| The lumen maintenance factor | ≥96% |

INDEX: VLE-TF07B

| | |
|--|--|
| Flicker metric (Pst LM) | ≤1 |
| Stroboscopic effect metric (SVM) | ≤0.4 |
| Colour consistency in MacAdam ellipses (SDCM) | <6 (3000K), <6 (4000K), <6 (5500K) |
| CRI Min | Ra 80 |
| CRI Max | Ra 88 |

Additional information

| | |
|------------------------------------|----------------------|
| Place of installation | Desk, Floor |
| Place of application | indoor |
| Housing colour | Black |
| Ultraviolet radiation | no |
| Operating temperature range | -10° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |
| Housing material | Aluminum, Plastic |

Dimensions

| | |
|-------------------------|---------------|
| EAN | 5904405541241 |
| Height | 1733 mm |
| Depth | 230 mm |
| In the package | 1 pc. |
| Outer box | 4 pcs. |
| Width | 230 mm |
| Unit nett weight | 3kg |

Signs marking goods
Packaging marking



Recycling of
waste, CE,
Utilization



VIDEX®**VIDEX-FLOOR-LAMP-TOKYO-BLACK****INDEX: VLE-TF07B**

INDEX: VLE-TF07B

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

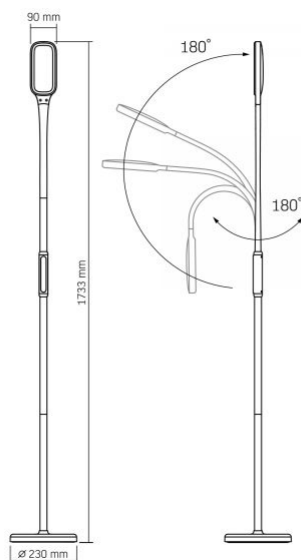

We reserve the right to make technical changes. The data contained in this material is not legally binding.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

Rated beam angle



Ra ≥ 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Dimmable

The product has 5-level brightness adjustment



-10° +40°C

Operating temperatures range



No Flicker

The flickering of the light does not exceed the permissible level



No Flicker

The product has minimal flickering, which should not cause discomfort or danger



CCT 3000K

Colour consistency in MacAdam ellipses (SDCM)



CCT 4000K

Colour consistency in MacAdam ellipses (SDCM)



CCT 5500K

Colour consistency in MacAdam ellipses (SDCM)



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture