

## TECHNICAL CARD



LED Downlight Fixture



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®

**VIDEX-DOWNLIGHT-LED-DLBR-044-4W-NW**
**INDEX: VLE-DLBR-044**


120°



Ra ≥ 80



ON/OFF

20 000



30 000 h



Free



Not Dimmable



-20° +40°C



Free



IP20

## WARRANTY 2 YEARS

**NEUTRAL WHITE**

**4000K**

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrarno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Light source or containing product	Containing product
Control gear replaceable	-
Light source replaceable	by the producer

### Type of light source

Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No

**Energy efficiency class of the contained light source** F

### Electrical parameters

On-mode power (Pon)	4 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	30 mA
Input interface	Free wire ends
Electric shock protection class	II
Energy consumption in on-mode of the light source (kWh/1000h)	4
Survival factor	0.9

### Photometric parameters

Correlated color temperature	4000K (neutral white)
Useful luminous flux of the contained light source (Φuse)	380 Lm
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)

### Additional information

Place of installation	Ceiling, Recessed
Place of application	indoor

# VIDEX®

VIDEX-DOWNLIGHT-LED-DLBR-044-4W-NW

INDEX: VLE-DLBR-044

<b>Housing colour</b>	White
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Plastic

## Dimensions


<b>EAN</b>	5904405540855
<b>Height</b>	98 mm
<b>Depth</b>	26 mm
<b>Width</b>	98 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	40 pcs.

## Signs marking goods

<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------



## INDEX: VLE-DLBR-044

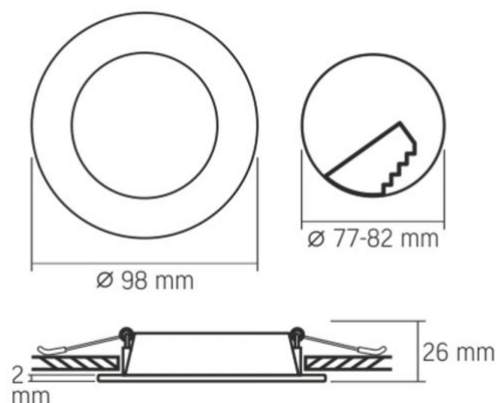

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-20° +40°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture