

## TECHNICAL CARD



LED Downlight Fixture



# VIDEX®



120°



Ra ≥ 80



30 000 h

ON/OFF  
20 000

Free



-20° +40°C



Not Dimmable



Free



IP20

## WARRANTY 2 YEARS

### NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Control gear replaceable	-
Light source replaceable	by the producer

### Type of light source

Energy class of the light source	E
Dimmable	no

### Electrical parameters

On-mode power (Pon)	12 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	90 mA
Input interface	Free wire ends
Electric shock protection class	II

## VIDEX-DOWNLIGHT-LED-DLBR-124-12W-NW

### INDEX: VLE-DLBR-124

### Photometric parameters

Useful luminous flux of the light source (Φuse)	1350 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)

### Additional information

Place of installation	Ceiling, Recessed
Place of application	indoor
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

### Dimensions


EAN	5904405540879
Height	175 mm
Width	175 mm
Depth	27 mm


**VIDEX®**

VIDEX-DOWNLIGHT-LED-DLBR-124-12W-NW

**INDEX: VLE-DLBR-124****Outer box**

20 pcs.

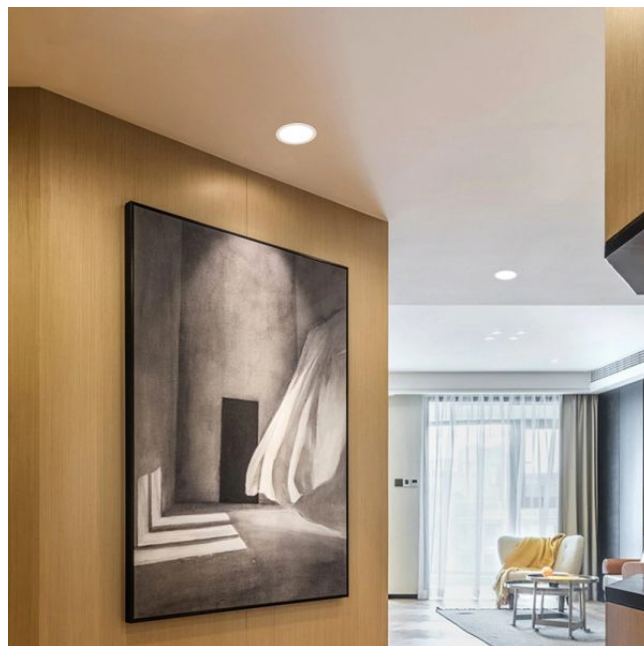

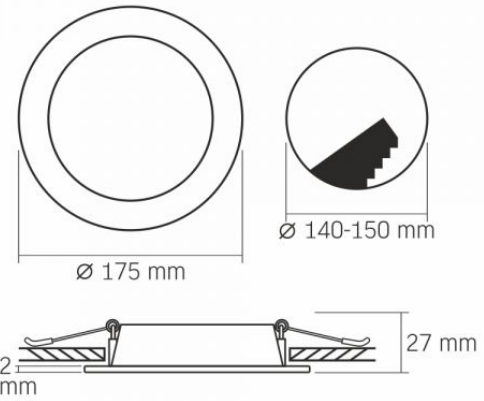**INDEX: VLE-DLBR-124**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.