

TECHNICAL CARD



LED Recessed Downlight




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®


VIDEX-DOWNLIGHT-LED-DLBR-124-BLACK-12W-NW

INDEX: VLE-DLBR-124B

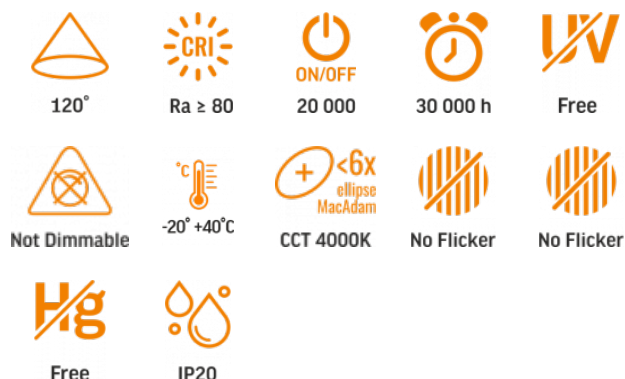

WARRANTY 2 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source or containing product	Containing product
Control gear replaceable	-
Light source replaceable	by the producer
Type of light source	
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS

High luminance light source	No
Anti-glare shield	No
Technology	LED
Energy efficiency class of the contained light source	E

Electrical parameters

On-mode power (Pon)	12 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	130 mA
Input interface	Free wire ends
Electric shock protection class	II
Energy consumption in on-mode of the light source (kWh/1000h)	12
Displacement factor (cos φ1)	0.7
Survival factor	0.9

Photometric parameters

Correlated color temperature	4000K (neutral white)
Useful luminous flux of the contained light source (Φuse)	1350 Lm
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)
Chromaticity coordinates (x)	0.38

INDEX: VLE-DLBR-124B

Chromaticity coordinates (y)	0.38
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Colour consistency in MacAdam ellipses (SDCM)	<6 (4000K)
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
CRI Min	Ra 80
CRI Max	Ra 89

Additional information

Place of installation	Ceiling, Recessed
Place of application	indoor
Housing colour	Black
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

Dimensions

EAN	5904405542637
Height	175 mm
Depth	27 mm
Width	175 mm



In the package	1 pc.
Outer box	20 pcs.
Unit nett weight	126g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------





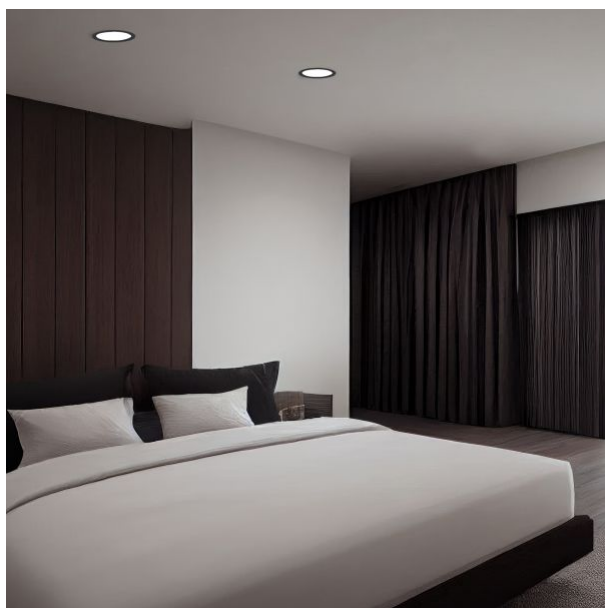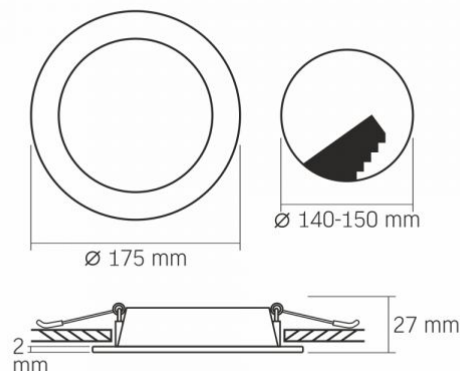















INDEX: VLE-DLBR-124B



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

-  The product must be used indoors
-  Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle 120°
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles 20 000
-  — Nominal lifetime (hours) 30 000 h
-  — The product does not emit ultraviolet light Free
-  — The product is incompatible with light regulators Not Dimmable
-  — Operating temperatures range -20° +40°C
-  — Colour consistency in MacAdam ellipses (SDCM) +5 CCT 4000K
-  — The flickering of the light does not exceed the permissible level No Flicker
-  — The product has minimal flickering, which should not cause discomfort or danger No Flicker
-  — The product does not contain mercury Free
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture IP20