


## TECHNICAL CARD



LED Downlight Fixture

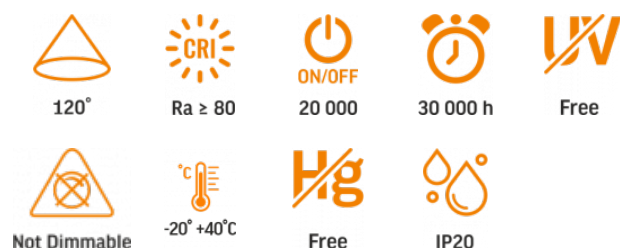

**INDEX: VLE-DLBR-184**

**WARRANTY 2 YEARS**


Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutalus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

**General parameters**

Light source or containing product	Containing product
Control gear replaceable	-
Light source replaceable	by the producer

**Type of light source**

Dimmable	no
Energy efficiency class of the contained light source	E

**Electrical parameters**

On-mode power (Pon)	18 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	130 mA

Input interface	Free wire ends
Electric shock protection class	II

**Photometric parameters**

Useful luminous flux of the contained light source (Φuse)	2100 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)

**Additional information**

Place of installation	Ceiling, Recessed
Place of application	indoor
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

**Dimensions**

EAN	5904405540886
-----	---------------


**VIDEX®**

VIDEX-DOWNLIGHT-LED-DLBR-184-18W-NW

**INDEX: VLE-DLBR-184**

<b>Height</b>	222 mm
<b>Depth</b>	27 mm
<b>Outer box</b>	20 pcs.
<b>Width</b>	222 mm

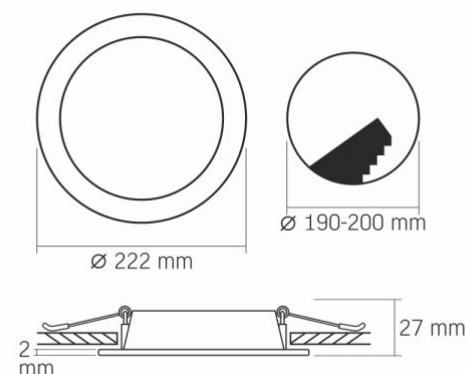

**INDEX: VLE-DLBR-184**


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



120°

— Rated beam angle



Ra ≥ 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture