

TECHNICAL CARD



LED Downlight Fixture



VIDEX®



WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable -

Light source replaceable by the producer

Type of light source

Energy class of the light source F

Dimmable no

Electrical parameters

On-mode power (Pon) 6 W

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Rated current 45 mA

Input interface Free wire ends

Electric shock protection class II

VIDEX-DOWNLIGHT-LED-DLBS-064-6W-NW

INDEX: VLE-DLBS-064

Photometric parameters

Useful luminous flux of the light source (Φuse)	620 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a sphere (360°)

Additional information

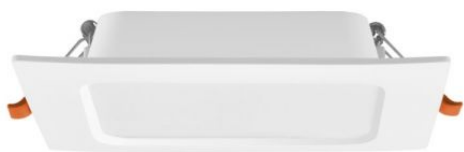
Place of installation	Ceiling, Recessed
Place of application	indoor
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20
Housing material	Plastic

Dimensions

EAN	5904405540893
Height	120 mm
Width	120 mm

VIDEX®

VIDEX-DOWNLIGHT-LED-DLBS-064-6W-NW

INDEX: VLE-DLBS-064**Depth** 27 mm**Outer box** 40 pcs.

INDEX: VLE-DLBS-064

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

