

## TECHNICAL CARD



Led Fixture Architectural



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



IK07



-25° +50°C



Free



IP54

## WARRANTY 2 YEARS

### General parameters

**Light source replaceable** end user

### Electrical parameters

**Rated voltage, frequency** AC 220-240 V, 50/60 Hz

**Input interface** Terminal block

**Electric shock protection class** I

### Additional information

**Place of installation** Wall

**Place of application** indoor, outdoor

**Impact protection** IK07

**Housing colour** Gray

**Operating temperature range** -25° +50°C

**Suitable for installation in normally flammable surfaces** yes

**Mercury content** Does not contain

**Ingress protection** IP54

**Housing material** Aluminum, PC

## VIDEX VL-AR071G

### INDEX: VL-AR071G

### Dimensions

<b>EAN</b>	4820246480864
<b>Height</b>	154 mm
<b>Width</b>	80 mm
<b>Depth</b>	112 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	12 pcs.
<b>Unit nett weight</b>	650g

### Signs marking goods



**Packaging marking** CE, Utilization



### INDEX: VL-AR071G

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

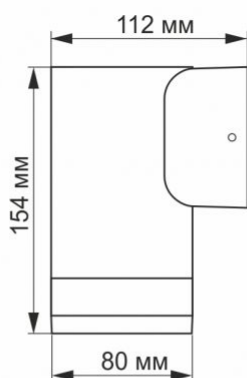

The product must be used indoors



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



The product can be installed and used in/on normally flammable surfaces



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



IK07

The product withstands a medium impact (e.g., from a blunt object)



-25° +50°C

Operating temperatures range



Free

The product does not contain mercury



IP54

Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing