

## TECHNICAL CARD



LED Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®



90°



Ra ≥ 80



30 000 h

ON/OFF  
20 000

IK07



Free



Not Dimmable







Free



IP65

## WARRANTY 2 YEARS

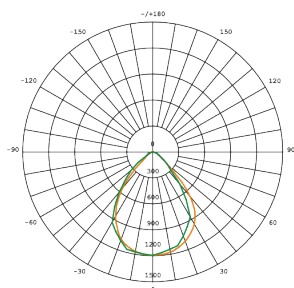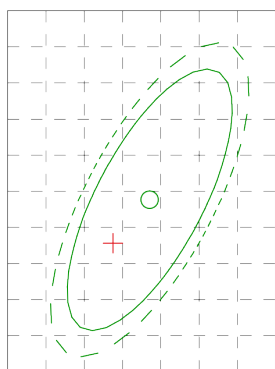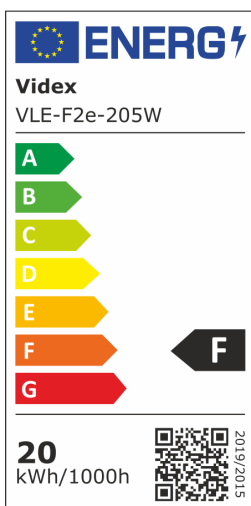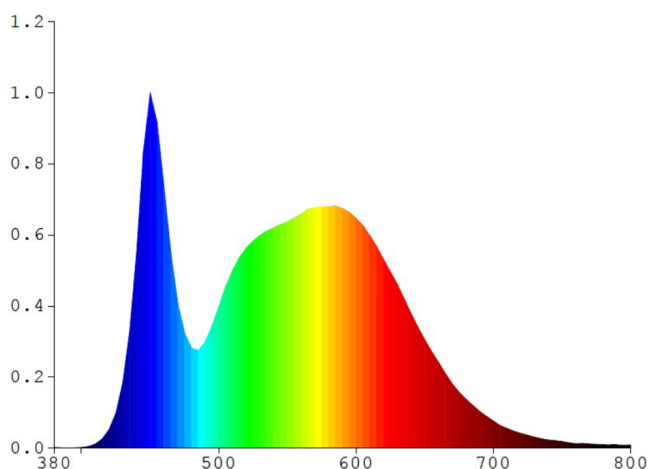

### NEUTRAL WHITE



### 5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## VIDEX-FLOOD-LED-LUCA-20W-NW

### INDEX: VLE-F2e-205W

## General parameters

Control gear replaceable	-
Light source replaceable	no

## Type of light source

Energy class of the light source	F
Dimmable	no
Technology	LED

## Electrical parameters

On-mode power (Pon)	20 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	20 cm
Rated current	96 mA
Input interface	Free wire ends
Electric shock protection class	I

## Photometric parameters

Useful luminous flux of the light source (Φuse)	1800 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1350 cd
Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000

### INDEX: VLE-F2e-205W

**Useful luminous flux of the light source reference** in a wide cone (120°)

#### Additional information

<b>Vertical adjustment range</b>	180°
<b>Place of installation</b>	Ceiling, Flat surface, Wall
<b>Place of application</b>	outdoor
<b>Housing colour</b>	White
<b>Impact protection</b>	IK07
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Diffuser material</b>	PC
<b>Ultraviolet radiation</b>	no
<b>Motion sensor</b>	no
<b>Operating temperature range</b>	-20° +50°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum alloy

#### Dimensions


<b>EAN</b>	5904405541104
<b>Height</b>	103 mm
<b>Depth</b>	19 mm
<b>Width</b>	127 mm
<b>Outer box</b>	20 pcs.
<b>In the package</b>	1 pc.



# VIDEX®

## VIDEX-FLOOD-LED-LUCA-20W-NW

### INDEX: VLE-F2e-205W

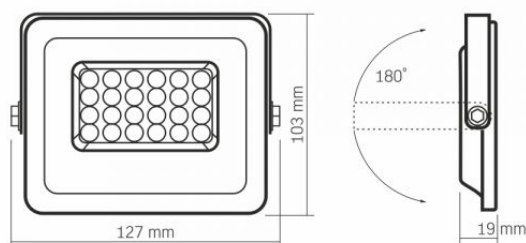

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

Date: 8.09.2024