

TECHNICAL CARD



LED Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



Free



-20°C +50°C



Not Dimmable







Free



IP65

WARRANTY 2 YEARS

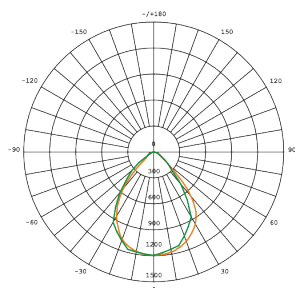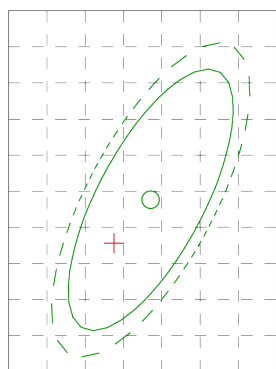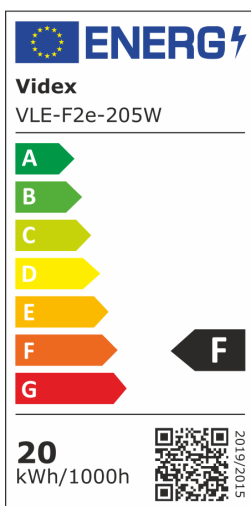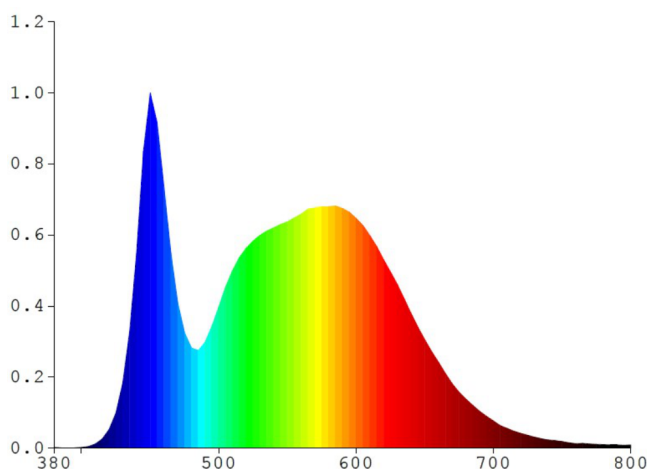

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

VIDEX-FLOOD-LED-LUCA-20W-NW

INDEX: VLE-F2e-205W

General parameters

Control gear replaceable	-
Light source replaceable	no

Type of light source

Energy class of the light source	F
Dimmable	no
Technology	LED

Electrical parameters

On-mode power (Pon)	20 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	20 cm
Rated current	96 mA
Input interface	Free wire ends
Electric shock protection class	I

Photometric parameters

Useful luminous flux of the light source (Φuse)	1800 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1350 cd
Beam angle	90°
Color rendering index (CRI)	Ra > 80
Lifetime	30000 h
On/Off cycles	20000

INDEX: VLE-F2e-205W

Useful luminous flux of the light source in a wide
reference cone (120°)

Additional information

Place of installation	Ceiling, Flat surface, Wall
Vertical adjustment range	180°
Place of application	outdoor
Housing colour	White
Impact protection	IK07
Minimum distance from the illuminated object	0.5 m
Diffuser material	Polycarbonate (PC)
Ultraviolet radiation	no
Motion sensor	no
Operating temperature range	-20° +50°C
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions


EAN	5904405541104
Height	103 mm
Width	127 mm
Depth	19 mm
Outer box	20 pcs.
In the package	1 pc.



VIDEX®

VIDEX-FLOOD-LED-LUCA-20W-NW

INDEX: VLE-F2e-205W

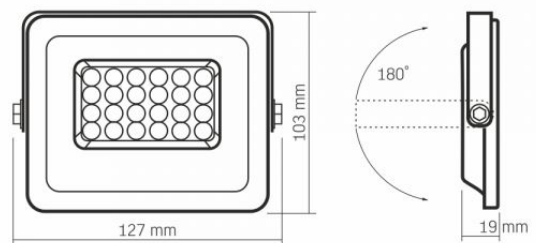

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

Date: 9.01.2025