

TECHNICAL CARD



LED Frame Panel




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



WARRANTY 3 YEARS

NEUTRAL WHITE



Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable	by the producer
--------------------------	-----------------

Light source replaceable	no
--------------------------	----

Type of light source

Energy class of the light source	E
----------------------------------	---

Dimmable	no
----------	----

Technology	LED
------------	-----

Electrical parameters

Rated voltage, frequency	AC 175-265 V, 50/60 Hz
--------------------------	------------------------

Cable length	75 cm
--------------	-------

Rated current	300 mA
---------------	--------

Input interface	Free wire ends
-----------------	----------------

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

INDEX: VLE-PA404W

Electric shock protection class	II
---------------------------------	----

Photometric parameters

Useful luminous flux of the light source (Φ _{use})	4500 Lm
--	---------

Correlated color temperature	4000K (neutral white)
------------------------------	-----------------------

Beam angle	120°
------------	------

Color rendering index (CRI)	Ra > 80
-----------------------------	---------

Lifetime	30000 h
----------	---------

On/Off cycles	20000
---------------	-------

Useful luminous flux of the light source reference	in a sphere (360°)
--	--------------------

Additional information

Place of installation	Armstrong ceiling, Ceiling
-----------------------	----------------------------

Place of application	indoor
----------------------	--------

Housing colour	White
----------------	-------

Diffuser material	Plastic
-------------------	---------

Ultraviolet radiation	no
-----------------------	----

Operating temperature range	-20° +40°C
-----------------------------	------------

Mercury content	Does not contain
-----------------	------------------

Ingress protection	IP20
--------------------	------

Housing material	Aluminum
------------------	----------

Dimensions


EAN	5904405541029
-----	---------------

VIDEX[®]

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

INDEX: VLE-PA404W

Height	591 mm
Width	591 mm
Depth	11 mm
Outer box	10 pcs.

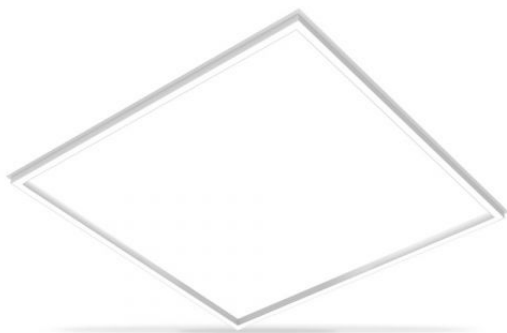

INDEX: VLE-PA404W

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

