

## TECHNICAL CARD



LED Frame Panel




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX®


## VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

### INDEX: VLE-PA404W

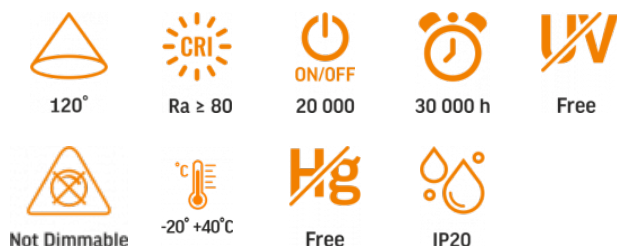

## WARRANTY 3 YEARS

### NEUTRAL WHITE



### 4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrarno bijela / Neutralweiß / Alb neutru / Neutrālus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

## General parameters

Light source or containing product	Containing product
Light source replaceable	no
Control gear replaceable	by the producer

## Type of light source

Energy efficiency class of the contained light source	E
Dimmable	no
Technology	LED

## Electrical parameters

Rated voltage, frequency	AC 175-265 V, 50/60 Hz
Cable length	75 cm

Rated current	300 mA
Input interface	Free wire ends
Electric shock protection class	II
Displacement factor (cos φ1)	0.9

## Photometric parameters

Useful luminous flux of the contained light source (Φuse)	4500 Lm
Correlated color temperature	4000K (neutral white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a sphere (360°)
CRI Min	Ra 80
CRI Max	Ra 88

## Additional information

Place of installation	Armstrong ceiling, Ceiling
Place of application	indoor
Housing colour	White
Diffuser material	Plastic
Ultraviolet radiation	no
Operating temperature range	-20° +40°C
Mercury content	Does not contain

# VIDEX®

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

INDEX: VLE-PA404W


Ingress protection	IP20
Housing material	Aluminum

## Dimensions



EAN	5904405541029
In the package	2 pc.
Height	591 mm
Outer box	20 pcs.
Width	591 mm
Depth	11 mm
Unit nett weight	450g x2

## Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
-------------------	-------------------------------------

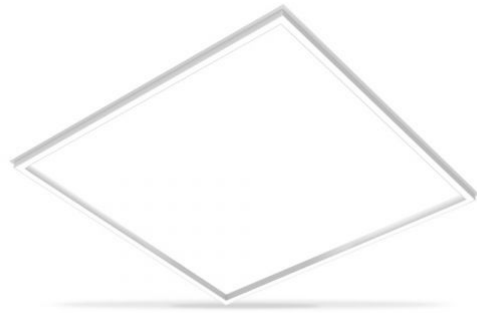

### INDEX: VLE-PA404W

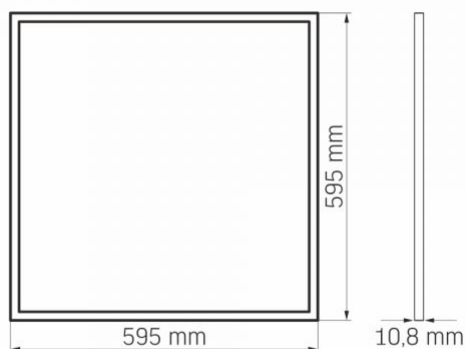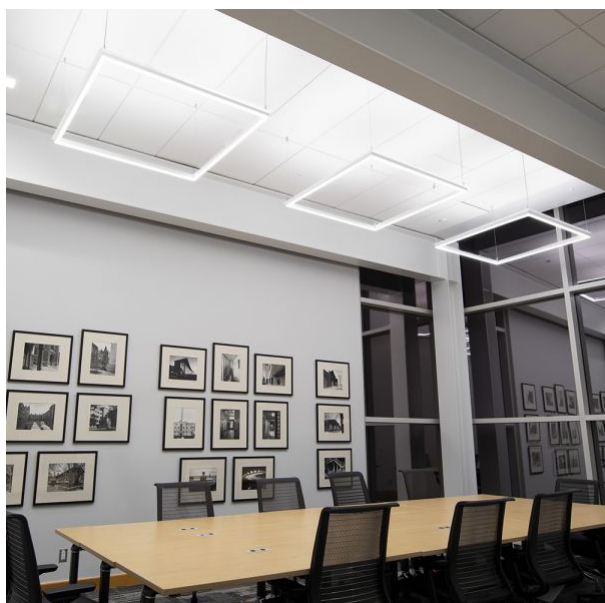

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

Rated beam angle



Ra > 80

Ra > 80 - color rendering index



20 000

Rated On/off cycles



30 000 h

Nominal lifetime (hours)



Free

The product does not emit ultraviolet light



Not Dimmable

The product is incompatible with light regulators



-20° +40°C

Operating temperatures range



Free

The product does not contain mercury



IP20

Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture