

TECHNICAL CARD



LED Frame Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



120°



Ra ≥ 80



30 000 h

ON/OFF
20 000

Free



Not Dimmable



Free



IP20

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

| | |
|--------------------------|-----------------|
| Control gear replaceable | by the producer |
| Light source replaceable | no |

Type of light source

| | |
|----------------------------------|-----|
| Energy class of the light source | E |
| Dimmable | no |
| Technology | LED |

Electrical parameters

| | |
|--------------------------|------------------------|
| Rated voltage, frequency | AC 175-265 V, 50/60 Hz |
| Cable length | 75 cm |
| Rated current | 300 mA |
| Input interface | Free wire ends |

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

INDEX: VLE-PA404W

Electric shock protection class II

Photometric parameters

| | |
|--|-----------------------|
| Useful luminous flux of the light source (Φ _{use}) | 4500 Lm |
| Correlated color temperature | 4000K (neutral white) |
| Beam angle | 120° |
| Color rendering index (CRI) | Ra > 80 |
| Lifetime | 30000 h |
| On/Off cycles | 20000 |
| Useful luminous flux of the light source reference | in a sphere (360°) |

Additional information

| | |
|-----------------------------|----------------------------|
| Place of installation | Armstrong ceiling, Ceiling |
| Place of application | indoor |
| Housing colour | White |
| Diffuser material | Plastic |
| Ultraviolet radiation | no |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |
| Housing material | Aluminum |

Dimensions


EAN 5904405541029

VIDEX[®]

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

INDEX: VLE-PA404W

| | |
|------------------|---------|
| Height | 591 mm |
| Width | 591 mm |
| Depth | 11 mm |
| Outer box | 10 pcs. |

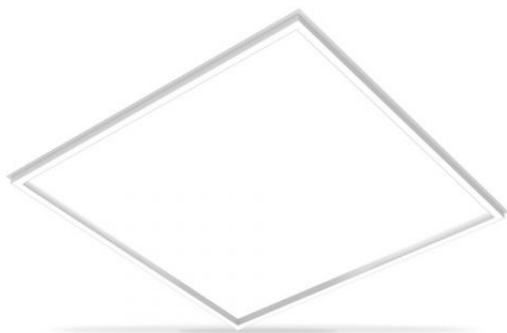

INDEX: VLE-PA404W

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

